


Remote Heads LED

Project:	
Type:	
Catalog #:	

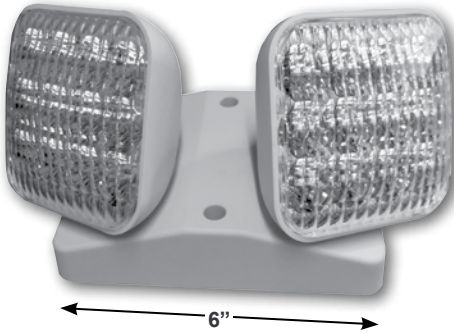

ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- High-performance chrome-plated metalized reflector and plastic lens (indoor applications) or glass lens (outdoor applications) for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing with 8 LEDs in each lamp head.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

- Suitable for wall or ceiling mount.

HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Outdoor application remote heads are die-cast aluminum, sealed and gasketed in gray or black finish.

WARRANTY/LISTING

- Three year warranty.
- UL listed.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

Model #	# of Heads	Voltage	Wattage	Application
SEELEDID1M1	1	3.6 Volt	1	Indoor
SEELEDID1M1SDT	1	3.6 Volt	1	Indoor
SEELEDOD1M1WPSDT	1	3.6 Volt	1	Outdoor
SEELEDOD1M1WP	1	3.6 Volt	1	Outdoor
SEELEDID2M1	2	3.6 Volt	1	Indoor
SEELEDID2M1SDT	2	3.6 Volt	1	Indoor
SEELEDOD2M1WPSDT	2	3.6 Volt	1	Outdoor
SEELEDOD2M1WP	2	3.6 Volt	1	Outdoor

Other voltage and wattage options available. Please contact customer service.

Model #	# of Heads	Voltage	Wattage	Application
SEELEDID1XC	1	9.6 Volt	1	Indoor
SEELEDID1XCSDT	1	9.6 Volt	1	Indoor
SEELEDOD1XCWPSDT	1	9.6 Volt	1	Outdoor
SEELEDOD1XCWP	1	9.6 Volt	1	Outdoor
SEELEDID2XC	2	9.6 Volt	1	Indoor
SEELEDID2XCSDT	2	9.6 Volt	1	Indoor
SEELEDOD2XCWPSDT	2	9.6 Volt	1	Outdoor
SEELEDOD2XCWP	2	9.6 Volt	1	Outdoor

Other voltage and wattage options available. Please contact customer service.