

# SEET-500TD

## LOW PROFILE T5 FLUORESCENT EMERGENCY BALLAST 500 LUMENS



STANDARD



### ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 500 lumens.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable sealed NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Time delay enhancement to overcome end-of-life circuit protection.

### MOUNTING

- Suitable for installation inside, on top or in remote\* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

### HOUSING


- Low profile galvanized steel construction.
- Compact design fits most fluorescent fixtures.

### LISTINGS AND WARRANTIES


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Suitable for use in sealed and gasketed fixtures.

### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts.
- Operates one T5, T8, T12, Circular T5/T9 and U-bend T8/T12 lamp in emergency mode. Refer to the chart on the next page for a complete list of compatible lamps.



### DIMENSIONS

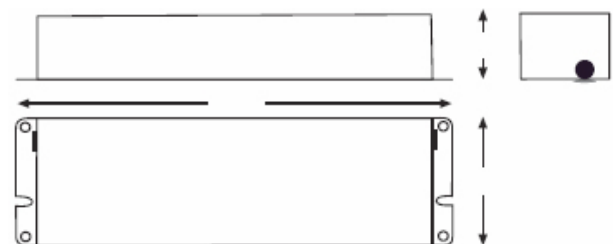

### ORDERING INFORMATION

Sample Part Number: **SEET5-500TD**

\*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

MODEL	DESCRIPTION
SEET5-500TD	500 Lumens Low Profile T5 Fluorescent Emergency Ballast with Time Delay

NOTE: Product specifications subject to change without notice. Updated 08.2017