



# DEFENDER PLUS

## 2.4- 4.2KW SINGLE PHASE UNINTERRUPTED EMERGENCY LIGHTING & POWER SYSTEM

The Defender Plus maintains efficient AC Emergency Power to operate all emergency lighting fixtures at “full-light” output after the transfer is complete, providing superior dependability and security to commercial and industrial environments in a small footprint.

### POWER RATING

- 2.4KW – 4.2KW (or 2,400W – 4,200W) single phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

### INPUT

- 120, 208, 240, 277 or 480V AC input 60Hz

### OUTPUT

- 120, 277, 480, 120/240, 120/277 V AC output 60Hz  
True “on-line” design is ≥92% efficient at 100% linear load

### BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year pro-rated warranty
- Smart Battery Monitoring System is **Temperature Compensated** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

### LAMPS & LOADS

- Emergency power provides **Full Light Output** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, H.I.D., LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

### CODES

- UL924, UL1778, NFPA101, NFPA70, NEC & OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

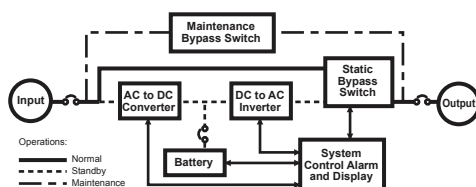

### PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and Watchdog Software to protect system performance and reliability
- Surge protection against load surges as defined in ANSI/IEEE C62.45 category A and B

### DIAGNOSTICS & MAINTENANCE

- DSP/PWM technology and Watchdog Software provides complete self-diagnostic capabilities and LED monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

### CABINET

- Space saving small footprint
- Modular design enables flexible installation

### INSTALLATION

- Modular design and small footprint allow easy installation in electrical closets or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

### SPECIAL APPLICATIONS

- Offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

### WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-Year with 9-Years pro-rated
- System 1-Year on-site warranty labor with Mfg. phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available

PLUS SERIES	POWER RATING	UPS			WEIGHT	BRITISH THERMAL UNITS	BATTERY TYPE	VOLTAGE (VAC)		OUTPUT PROTECTION	SAFETY APPROVALS
		CABINET DIMENSIONS						INPUT	OUTPUT		
DPLUS	KVA/KW	W	H	D	(LBS)	BTUs	SEALED, MAINTENANCE FREE (AGM) LEAD CALCIUM	(select)	(select)	INPUT & OUTPUT CIRCUIT BREAKERS STANDARD	UL924 UL1778 NFPA101 NFPA70 NEC
	2.4	26"	44"	26"	700	652.8		120	120		
	2.6	26"	44"	26"	700	707.2		208	277		
	3.0	26"	44"	26"	800	816		240	480		
	3.4	26"	44"	26"	800	924.8		277	120/240		
	3.8	26"	44"	26"	800	1033.6		or 408	or 120/277		
4.2	26"	44"	26"	920	1142.4						

The Defender Plus provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation... "simplicity" ...connect the Defender Plus to the emergency circuit(s) and everything is backed up... "reliability" ...during a power outage. All lighting connections to the Defender Plus will simply continue to operate at "**FULL LIGHT OUTPUT**" once the transfer is complete. Watchdog Software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **SECURITY, SAFETY AND PEACE OF MIND** that the Defender Plus ensures.

### ORDERING INFORMATION

- Choose the bold face catalog nomenclature that best suites your needs
- Write them on the appropriate line
- Order accessories as separate catalog number

Example:

**DPLUS-4.2-277/277-ECM277/3 OCB/277/3/20/1-45**

Description of Example:

(4.2KW, 277 Voltage In, 277 Voltage Out, 3 277V Environmental Control Modules, 3 Output 277 Voltage Circuit Breakers at 20amps, 2 pole, 45 minute run time)

DPLUS		VOLTAGE <sup>1</sup>		OPTIONS		TIME <sup>3</sup>
FAMILY	POWER RATING	INPUT/OUTPUT	INPUT/OUTPUT			Minutes
	KW	120/120	240/120-240	ECM120 – 120V Environmental Control Module <sup>2</sup> /qty		5
	2.4	120/277	240/120-277	ECM277 – 277V Environmental Control Module <sup>2</sup> /qty		10
	2.6	120/480	277/120	NOF – Normally "OFF" output circuit/voltage/qty/pole		15
	3.0	120/120-240	277/277	NOH – Normally OFF "HOLD ON"/voltage/qty/pole		20
	3.4	120/120-277	277/480	OCB – Output Circuit Breakers/voltage/qty/amps/pole		25
	3.8	208/120	277/120-240	EPO – Emergency Power Off		30
	4.2	208/277	277/120-277	RSSP – Remote Indicator Panel		45
		208/480	480/120	SNMP – SNMP Card		60
		208/120-240	480/277	FC – Form "C" Contacts		90 (Standard)
		208/120-277	480/480	SRB – Seismic Rated Bracket		120
		240/120	480/120-277	STU1 – Onsite Start-up		180
		240/277	480/120-277	IDB – Internal Dimmer Bypass		240
		240/480	480/480	EMB – External Maintenance Bypass Switch		
				EW – Extended Warranty		

<sup>1</sup> Consult factory for other voltage requirements  
<sup>2</sup> Special voltages may affect the weight, size and number of cabinets  
<sup>3</sup> One ECM is used per switching device or circuit  
<sup>4</sup> Consult factory for other run times