

SEECAELXTE: Chicago Approved LED Edgelit Exit Signs – Surface Mount

Project:	
Type:	
Catalog #:	



Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

Electrical

- Dual 120V/277V.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

Housing

- Premium-grade, extruded aluminum housing.

Warranty

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

Ordering information

Model	Face #	Letter/Background Color	Housing Color	Battery	Signage/Directional Arrows
CAELXTEU	1	Single	A Aluminum	Blank AC only	NA EXIT, no arrow
	2	Double	W White	EM Ni-Cd battery	SWNA STAIRS, no arrow
		RW Red on white			DA EXIT, double arrow
					SWDA STAIRS, double arrow
					RA¹ EXIT, right arrow
					SWRA¹ STAIRS, right arrow
					LA¹ EXIT, left arrow
					SWLA¹ STAIRS, left arrow
					LARA² EXIT, left/right arrow
					SWLARA² STAIRS, left/right arrow


Notes:

1. Available in single face configuration only.
2. Available in double face configuration only.

Listing

- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

Dimensions

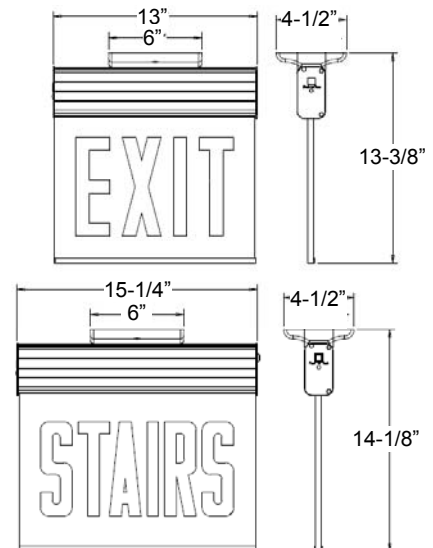

Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A