

## STANDARD



## ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, one watt white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

## ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap
- 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

| Catalog Number  | Input Watts (W) |      |      | Input Amps (A) |      |      |
|-----------------|-----------------|------|------|----------------|------|------|
|                 | 120V            | 230V | 277V | 120V           | 230V | 277V |
| SEECEU RED      | 1.0             | 1.0  | 1.1  | 0.07           | 0.07 | 0.07 |
| SEECEU RED RC   | 1.1             | 1.1  | 1.3  | 0.08           | 0.08 | 0.09 |
| SEECEU GREEN    | 1.1             | 1.1  | 1.2  | 0.07           | 0.07 | 0.08 |
| SEECEU GREEN RC | 1.2             | 1.2  | 1.3  | 0.08           | 0.08 | 0.09 |

## MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

## OPTIONS


- SPV: UL Listed for special voltage option.



## LISTINGS AND WARRANTIES

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## DIMENSIONS

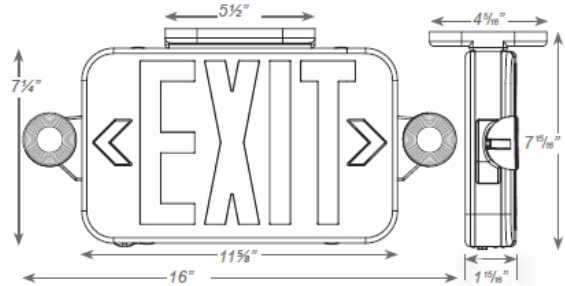

|                           | Maximum Wattage Allowed |
|---------------------------|-------------------------|
| <b>SEECEU</b>             | 2                       |
| <b>Remote Head Family</b> | <b>Total Wattage</b>    |
| RHLED-1-MV                | 1.0                     |
| RHLED-2-MV                | 2.0                     |
| RHLED-1-HL-MV             | 1.5                     |
| RHLED-1-LP-3.6            | 1.0                     |
| RHLED-2-LP-3.6            | 2.0                     |
| RHLED-1-WP-MV             | 1.0                     |
| RHLED-2-WP-MV             | 2.0                     |
| RHLED-1-WP-HL-MV          | 1.5                     |
| RHLED-1-PWP-MV            | 1.0                     |
| RHLED-2-PWP-MV            | 2.0                     |
| RHLED-1-PWP-HL-MV         | 1.5                     |

## ORDERING INFORMATION

Sample Part Number: **SEECEU-3-R-B**

| MODEL  | # OF FACES                  | LETTER COLOR         | HOUSING COLOR          | OPTIONS   |
|--------|-----------------------------|----------------------|------------------------|---|
| SEECEU | 3 - Universal Single/Double | R - Red<br>G - Green | W - White<br>B - Black | SPV - 120/230 Volt 50/60Hz<br>RC - Remote Control |

NOTE: Product specifications subject to change without notice. Updated 08.2017