

**Job Name:** \_\_\_\_\_

**Type:** \_\_\_\_\_

**Part #:** \_\_\_\_\_

**Notes:** \_\_\_\_\_

# SEECAELXTE

## Chicago Approved LED Edgelit Exit Signs – Surface Mount



**Illumination LISTED**

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

### Electrical

- Dual 120V/277V.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Mounting

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

### Housing

- Premium-grade, extruded aluminum housing.

### Warranty

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

### Ordering information




### Listing

standard).

- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

### Dimensions

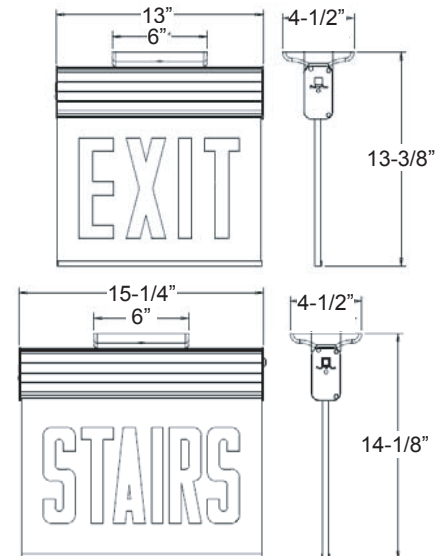

### Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A

Model	Face #	Letter/Background Color	Housing Color	Battery	Signage/Directional Arrows
SEECAELXTE		RW			
<b>SEECAELXTE</b>	1 Single 2 Double	<b>RW</b> Red on white	<b>A</b> Aluminum <b>W</b> White	<b>Blank</b> AC only <b>EM</b> Ni-Cd battery	<b>NA</b> EXIT, no arrow <b>SWNA</b> STAIRS, no arrow <b>DA</b> EXIT, double arrow <b>SWDA</b> STAIRS, double arrow <b>RA</b> <sup>1</sup> EXIT, right arrow <b>SWRA</b> <sup>1</sup> STAIRS, right arrow <b>LA</b> <sup>1</sup> EXIT, left arrow <b>SWLA</b> <sup>1</sup> STAIRS, left arrow <b>LARA</b> <sup>2</sup> EXIT, left/right arrow <b>SWLARA</b> <sup>2</sup> STAIRS, left/right arrow



**Job Name:**

**Type:**

**Part #:**

**Notes:**

**ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CALEDCXTEU	12	13	0.12A	0.06A
CALEDCXTEU-RC	12	13	0.12A	0.06A