

SEELEDCU2 ALL LED EXIT & EMERGENCY COMBO



STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery protected for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).

DIMENSIONS

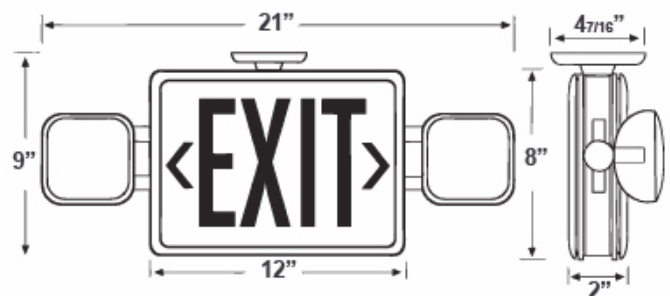

ORDERING INFORMATION

Sample Part Number: **SEELEDCU2-1-R-W**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
SEELEDCU2	1 - Single Face 2 - Universal Single/ Double Face	R - Red G - Green	W - White B - Black	HL - High Lumen RC - Remote Capacity SDT - Self-diagnostics

Special voltage & SALIDA face plate options available. Check with your Lighting Representative.

NOTE: Product specifications subject to change without notice. Updated 08.2017

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
SEELEDEXCU2-RED	3.7	3.8	0.040	0.020
SEELEDEXCU2-GREEN/RC	3.0	3.2	0.030	0.014
SEELEDEXCU2-RED-RC	3.4	3.6	0.033	0.015
SEELEDEXCU2/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022

CENTER-TO-CENTER SPACING GUIDELINES

- Consult factory for details.

REMOTE LAMP COMPATIBILITY

	Maximum Wattage Allowed
LEDCXTEU-RC	3

	Maximum Wattage Allowed
LEDCXTEU-RCSDT	3

Remote Head Family	Total Wattage
RHLED1-CLPCXTE	1
RHLED2-CLPCXTE	2
RHLED1-WP-CLPCXTE	1
RHLED2-WP-CLPCXTE	2
RHLED1-CLPCXTE-HL	1.5
RHLED2-CLPCXTE-HL	3
RHLED1-WP-CLPCXTE-HL	1.5
RHLED2-WP-CLPCXTE-HL	3

Remote Head Family	Total Wattage
RHLED1SDT-CLPCXTE	1
RHLED2SDT-CLPCXTE	2
RHLED1SDT-WP-CLPCXTE	1
RHLED2SDT-WP-CLPCXTE	2
RHLED1SDT-CLPCXTE-HL	1.5
RHLED2SDT-CLPCXTE-HL	3
RHLED1SDT-WP-CLPCXTE-HL	1.5
RHLED2SDT-WP-CLPCXTE-HL	3

NOTE: Product specifications subject to change without notice. Updated 08.2017