

# SEELEDMGWL WET LOCATION SEMIRECESSED MR-16 EMERGENCY UNIT



## FEATURES

- Compact, low-profile design in neutral finish
- Fully-gasketed polycarbonate enclosure provides resistance to corrosive atmospheres and non-hazardous environments
- UL Listed for wet locations and meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes Electrical

## ILLUMINATION

- Two fully adjustable, ultra-bright round 3.3 watt white LED lamp heads

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V, 4.5Ah, sealed acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Surface mount via easy connect back plate

## HOUSING

- Injection-molded, engineering grade, V-0 flame retardant, high thermoplastic in neutral gray finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, and hose-down conditions


## OPTIONS

- Using the optional internal heater (-HTR) enable the unit to be used in cold weather environments (contact customer service)

## LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery prorated for two years.

## DIMENSIONS

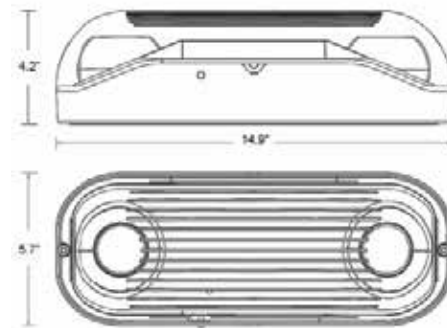

## ORDERING INFORMATION

Sample Part Number: **SEELEDMGWL-G-HTR**

MODEL	HOUSING COLOR	OPTIONS
SEELEDMGWL	G - Gray	HTR - Internal Heater USA - Assembled in the USA

NOTE: Product specifications subject to change without notice. Updated 08.2017