PROlite LED Lighting™

JOB NAME: _____

TYPE: _____

PART #: _____

NOTES: _____

PCV304

LED CANOPY LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The PCV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING


The ACV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

Building Canopy Parking
Garages Tunnels
Storage Facilities
Gas Stations

PRODUCT DIMENSIONS

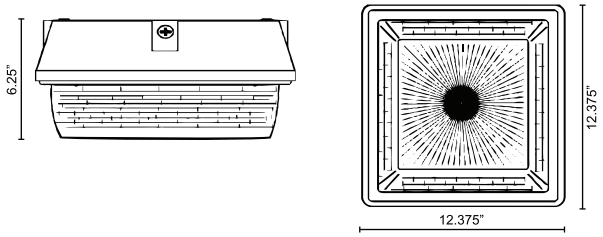

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

POWER

POWER FACTOR >90 - THD <20

ORDERING GUIDE

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PCV304				
PCV304	12W 24W 36W 48W 60W 72W	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	PC1 120V PHOTOCELL PC2 208/277V PHOTOCELL MS MOTION SENSOR D1 0-10V DIMMING D2 STEP DIMMING EM EMERGENCY BATTERY PACK V1 * 480/347V INPUT (120-277V STANDARD)

*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR

2026.10

Specifications subject to change without prior notice. © 2026 Emergensee Lighting Products, Inc. ALL RIGHTS RESERVED.