

# PECL SERIES

## EXPLOSION PROOF LUMINAIRE

The PECL SERIES Class 1, Division 2 Explosion Proof Hazardous Location Luminaire is available with a clear tempered glass lens. Typical lighting applications include industrial facilities, oil, gas, painting facilities, manufacturing, and auto service facilities.

### SPECIFICATIONS AND FEATURES

**HOUSING:** Heavy-Duty Die Cast Aluminum Housing

**LISTING AND RATINGS:** ETL Listed for Hazardous Locations Per UL844 as Follows: Class 1, Division 2 Groups A, B, C, D; T4 Temperature Rating, -25°C to +50°C Ambient. Suitable for Wet Locations, IP66 Sealed LED Compartment

**FINISH:** Powdercoat Finish Over a Chromate Conversion Coating.

**LENS:** Clear Tempered Glass Lens

**MOUNTING OPTIONS:** Mountings Include Pendant (Conduit by Others), Ceiling Mount Box, 25° and 90° Wall Mount with Box, 25° and 90° Stanchions, and Adjustable Yoke. Yoke Mount Includes 3' 16/3 SJOOW Yellow Jacketed Cord and Rated Connector. Rated for 6 #12 AWG 90°C for Through Wiring. Mounts Shipped Separately, Field Installed.

**LED:** Aluminum Boards

**WATTAGE:** Array: 56.7w, System: 64w

**DRIVER:** Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**WARRANTY:** 5-Year Warranty. See Page 4 for Projected Lumen Maintenance Table.


### PENDANT MOUNT




### CEILING MOUNT



### WALL MOUNTS

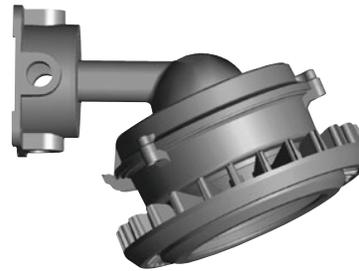


Shown with 25° Wall Mount

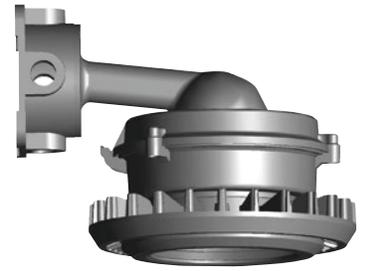

Shown with 90° Wall Mount

### STANCHION MOUNTS

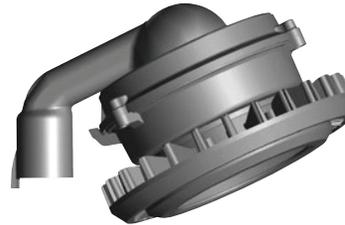


Shown with 25° Stanchion Mount



Shown with 90° Stanchion Mount


### FLOOD

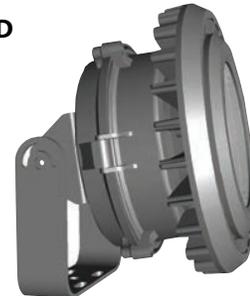

Shown with 25° Adjustable Yoke





## PENDANT MOUNT

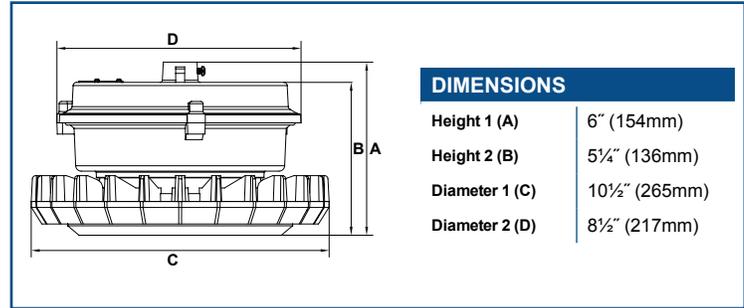

½" Pendant Hub

	B	57	LV	5K	TG	GR	D	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
PECL Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	D=Pendant Mount (Conduit by Others)	SP=Surge Protection


## CEILING MOUNT

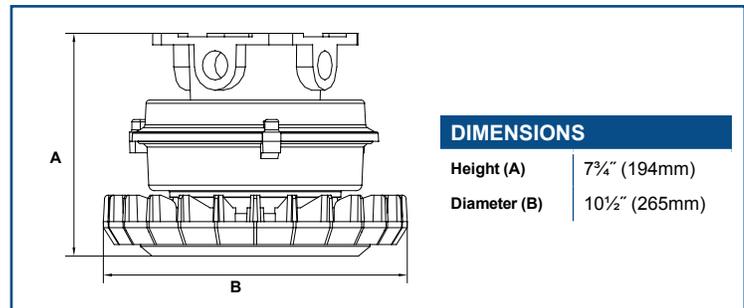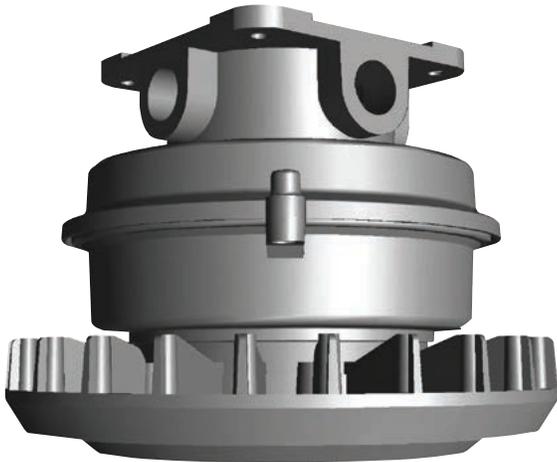


¾" Entrance Plug

	B	57	LV	5K	TG	GR	Q	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
PECL Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	Q=Ceiling Mount	SP=Surge Protection

## WALL MOUNTS

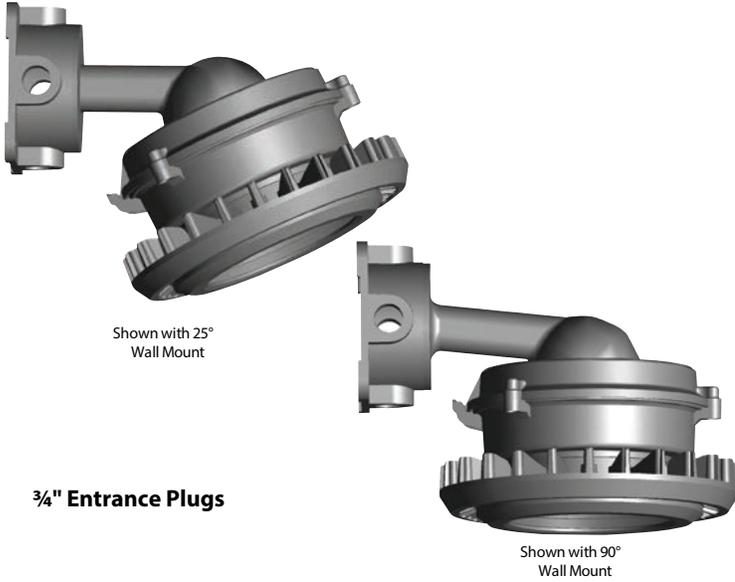


**25° Wall Mount**

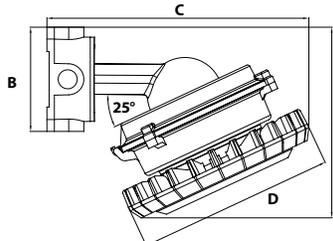

DIMENSIONS	
Height 1 (A)	10" (256mm)
Height 2 (B)	5½" (140mm)
Length (C)	13¾" (352mm)
Width (D)	10½" (265mm)

---


**90° Wall Mount**

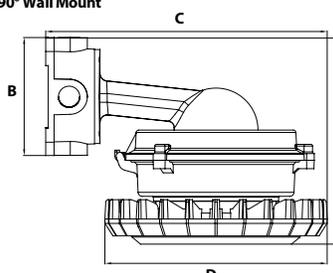


DIMENSIONS	
Height 1 (A)	9¾" (246mm)
Height 2 (B)	5½" (140mm)
Length (C)	13¾" (336mm)
Width (D)	10½" (265mm)

	B	57	LV	5K	TG	GR		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
PECL Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	W25=25° Wall Mount W90=90° Wall Mount	SP=Surge Protection

## STANCHION MOUNTS

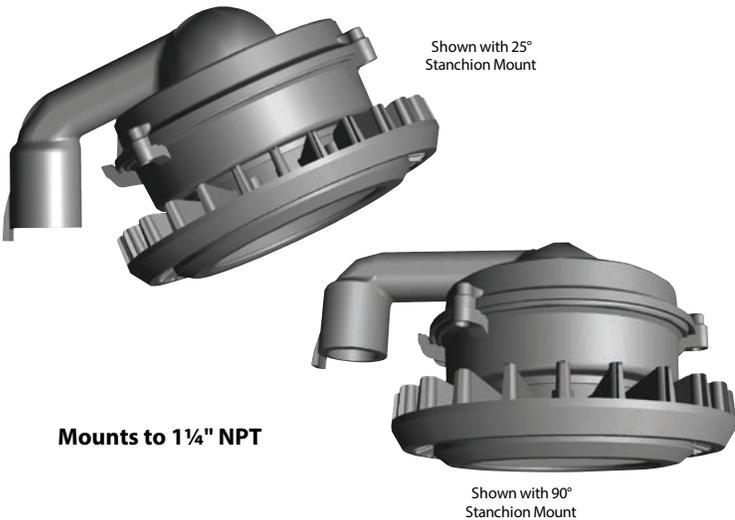


**25° Stanchion**

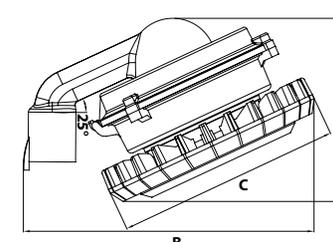

DIMENSIONS	
Height 1 (A)	8½" (216mm)
Length (B)	13½" (343mm)
Width (C)	10½" (265mm)

---


**90° Stanchion**

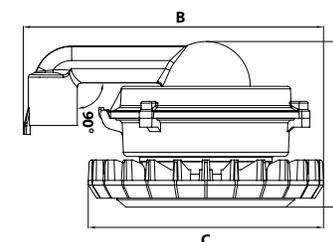


DIMENSIONS	
Height 1 (A)	7¼" (186mm)
Length (B)	13¾" (338mm)
Width (C)	10½" (265mm)

	B	57	LV	5K	TG	GR		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
PECL Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	S25=25° Stanchion S90=90° Stanchion	SP=Surge Protection

**FLOOD**

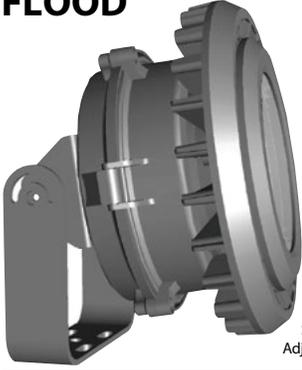



Shown with Adjustable Yoke

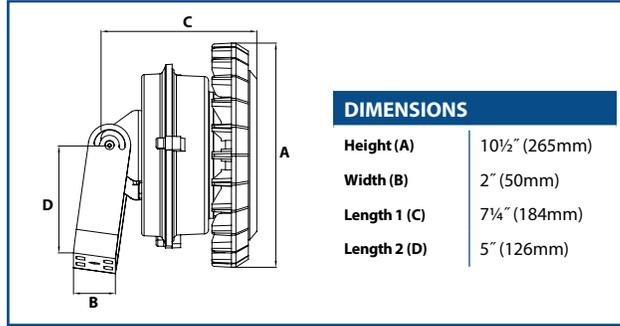

DIMENSIONS	
Height (A)	10½" (265mm)
Width (B)	2" (50mm)
Length 1 (C)	7¼" (184mm)
Length 2 (D)	5" (126mm)

	B	57	LV	5K	TG	GR	E	
Model	Optics	Wattage	Driver	CCT	Lens	Color	Mount	Options
PECL Hazardous Location Explosion Proof Luminaire	B=Wide	57=57w	LV=120-277V	5K=5000K	TG=Clear Tempered Glass Lens	GR=Gray	E=Adjustable Yoke	SP=Surge Protection

**PHOTOMETRIC DATA**

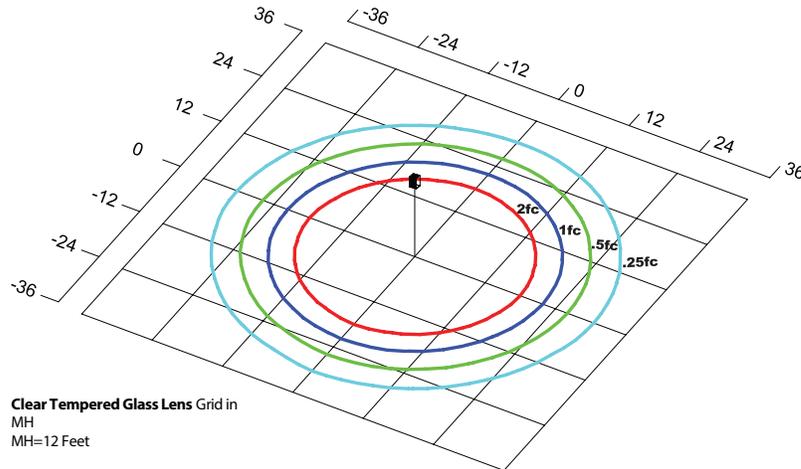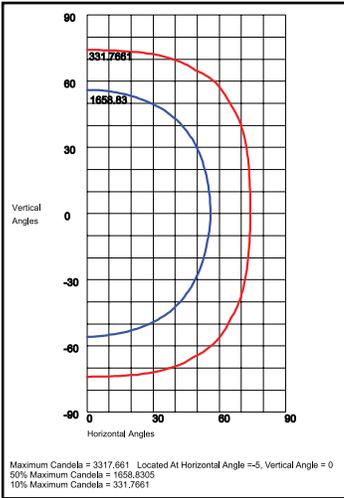

Clear Tempered Glass Lens

**PHOTOMETRIC PERFORMANCE**

LED Board Watts	Drive Current (mA)	Input Watts	5000 CCT 80 CRI			
			Optics	Lumens	LPW	
57w (Clear Lens)	175	64	F 110°H x 110°V, NEMA 7H x 7V	8,957	140	

**PROJECTED LUMEN MAINTENANCE**

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70 at 25°C
<b>L70 Lumen Maintenance at 25°C / 77°F</b>						
TM-21-11	64	1.00	0.96	0.92	0.84	183,000
<b>L80 Lumen Maintenance at 50°C / 104°F</b>						
TM-21-11	64	1.00	0.93	0.86	0.71	105,000
<b>L80 Lumen Maintenance at 40°C / 104°F</b>						
TM-21-11	64	1.00	0.94	0.88	0.75	81,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 175mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.