


PFD324 MUSHROOM 14"

- Electronic Dimmable LED (120V only)
- UL Listed for Damp Locations
- Ceiling or Wall Mount

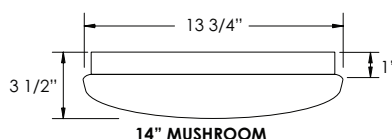

EXAMPLE # EFD324-I240-WW-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFD324	DEDICATED 120V LED	ALUMINUM W-White	ACRYLIC W-White	M -Motion Sensor 120V only. See page 16. EB -Emergency Backup See page 123.
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE			
	LE1200 - 14W, 80 CRI W -1430lm 3000K >102 Lumens Per Watt** C -1500lm 4000K			
	LE1800 - 22W, 80 CRI W -1950lm 3000K >88 Lumens Per Watt** C -2130lm 4000K			
	LE2600 - 32W, 80 CRI W -2700lm 3000K >84 Lumens Per Watt** C -2750lm 4000K			
	DEDICATED 120V LED - LOW FLICKER 90 CRI			
	LT1200 - 16W, 90 CRI W -1370lm 3000K >86 Lumens Per Watt** C -1400lm 4000K			
	LT1800 - 24W, 90 CRI W -1980lm 3000K >82 Lumens Per Watt** C -2020lm 4000K			
	LT2600 - 31W, 90 CRI W -2750lm 3000K >90 Lumens Per Watt** C -2850lm 4000K			
	MULTI-VOLT 120-277V LED			
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY			
	L1700 - 22W, 80 CRI W -1704lm 3000K >82 Lumens Per Watt** C -1824lm 4000K			
	INCANDESCENT 120V			LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE -A19/E26, 90CRI, 3000K LCE -A19/E26, 80CRI, 4000K
	INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max			