

PFS112


PFS113

NON-METALLIC OUTDOOR LIGHTING




Available in LED & Incandescent
 White Powder Coated Aluminum
 Wall or Ceiling Mount
 UL Listed for Wet Locations

Standard Pack QTY: 6

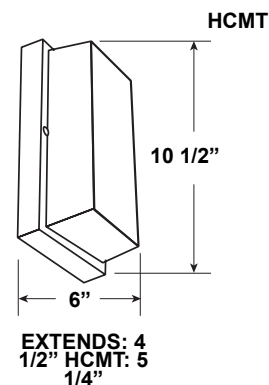

PFS113



PFS112

ORDER INFORMATION:

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFS112	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White	ACRYLIC	N/A
PFS113	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**	W-900lm 3000K C-1000lm 4000K	F-Glare Reduced Frost Prismatic	
	INCANDESCENT, MEDIUM BASE, 120V I40-1 X 40W Max	W-White	ACRYLIC F-Glare Reduced Frost Prismatic	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE-A19/E26, 2700K