

PRO-WPUD

CCT + 3-Power Selectable Semi-Circle Up/Down Wall Pack

Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: Wet Location IP65
- Impact Rating: IK08
- Beam Angle: Type III (Standard)
- Chip: SMD 2835, R9 >50, CRI >80
- BUG: B3-U2-G2
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Selectable light direction:
 - Up & down or down only
- Full Cut-Off Dark Sky Compliant With Uplight On
- Photocell is included with an on/off switch
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 3-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz



- **Mounting & Installation:** Mounts on to standard recessed junction box

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
 - 3P40: S-VHJ0K4
 - 3P80: S-Z34FFS
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017



DIMENSIONS

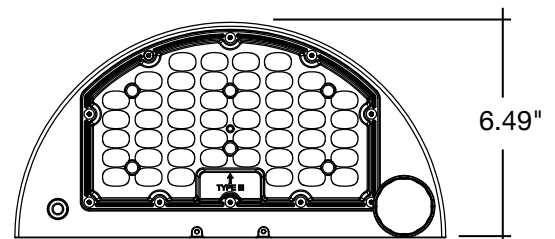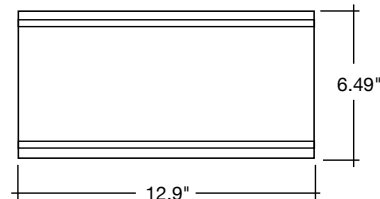

DOWNLIGHT ON ONLY 3P40	
WATT	LUMENS
24	3,480
32	4,640
40	5,800

DOWN & UP LIGHT ON (3P40)					
DOWN			UP		
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
19	2,755	5	725		
26	3,770	6	870		
32	4,640	8	1,160		

DOWNLIGHT ON ONLY 3P80	
WATT	LUMENS
48	6,960
64	9,280
80	11,600


DOWN & UP LIGHT ON (3P80)			
DOWN		UP	
WATT	LUMENS	WATT	LUMENS
38	5,510	10	1,450
51	7,395	13	1,885
64	9,280	16	2,320

Series	Finish ¹	Voltage	Photocell -PC	Optic	Sensor ²	Emergency	Surge Protector	Optional Accessories (Order Separately)
PRO-WPUD-SC-3P40-TRI 40/32/24w	BZ Bronze (Standard)	(blank) 120-347V	Selectable photocell	(blank) Type III	(blank) No Sensor	(blank) No Emergency	(blank) 6KV Built in	Remote for Sensors
PRO-WPUD-SC-3P80-TRI 80/64/48w	BL Black			T4 Type IV	BMS Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1)	EMB Emergency Backup	20KV 20KV Surge Protector	S-LINE-R S-Line Remote
	WH White			T5 Type V	BMSBT ENVISIONLS Bi-Level Motion + Daylight Sensor Bluetooth Control			
	GRY¹ Gray				BMS-SLV SILVAIR Bi-Level Motion + Daylight Sensor Bluetooth Control			
	CS¹ Custom Color							


1. Standard quickship is bronze, black & white. Other colors are made to order

2. Sensors require remote for programming

FEATURES

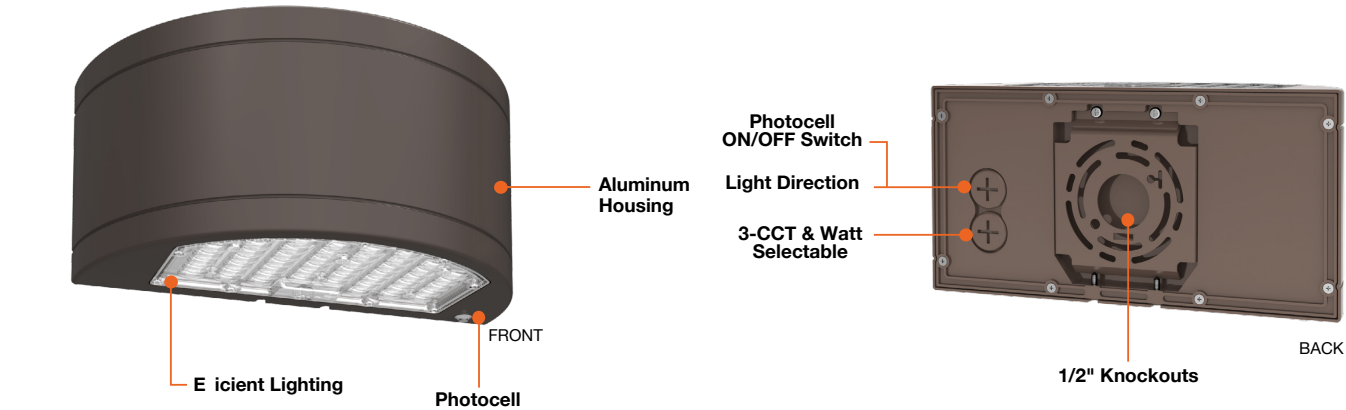

WALL PACK



T4
T5

Model	Voltage	Watts	Lumens	Color	CRI
PRO-WPUD-SC-3P40-TRI-BZ-PC	120-277V	40/32/24w	5,800/4,640/3,480	50/40/30k	>80
PRO-WPUD-SC-3P40-TRI-BL-PC	120-277V	40/32/24w	5,800/4,640/3,480	50/40/30k	>80
PRO-WPUD-SC-3P40-TRI-WH-PC	120-277V	40/32/24w	5,800/4,640/3,480	50/40/30k	>80
PRO-WPUD-SC-3P80-TRI-BZ-PC	120-277V	80/64/48w	11,600/9,280/6,960	50/40/30k	>80
PRO-WPUD-SC-3P80-TRI-BL-PC	120-277V	80/64/48w	11,600/9,280/6,960	50/40/30k	>80
PRO-WPUD-SC-3P80-TRI-WH-PC	120-277V	80/64/48w	11,600/9,280/6,960	50/40/30k	>80

LENS

Accessory Model	Description
T4	Type IV
T5	Type V



S-BMS-EXT-1
S-BMS-EXT-1-BT



S-LINE-R

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors