

SEEBLEDEM-BP/DM-20

EMERGENCY DRIVER FOR LED LAMPS (WITH INTERNAL/EXTERNAL DRIVER)

STANDARD



ILLUMINATION

- Provides 180-320VDC (equal to 120-230VAC) to the load during emergency mode operation
- For use with switched or unswitched fixtures
- Can be used with LED lamp loads of up to 20W and provide 100% lumen output

lumen output

ELECTRICAL

- Universal 120-277V, 50-60Hz input
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Long life, maintenance-free, rechargeable sealed NiCd battery
- Output short/overcurrent protection: Electronic limiting, with normal operation resuming upon removal of fault
- 90-minute minimum emergency operating time over full temperature range
- 24-hour maximum battery recharge time

MOUNTING


- Suitable for installation inside, on top or in remote* of the fixture
- Can be used in both switched and unswitched fixtures
- UL Listed for factory or field installation

HOUSING


- Durable painted steel construction in red finish
- Provided with 2' flex conduit

LISTINGS AND WARRANTIES

- Five year warranty against defects in material and workmanship (lamps excluded)
- Meets UL924, NF PA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations
- Suitable for damp locations (0°C – 50°C)

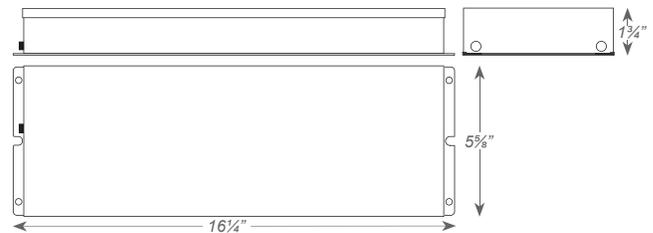

WIRING DIAGRAM

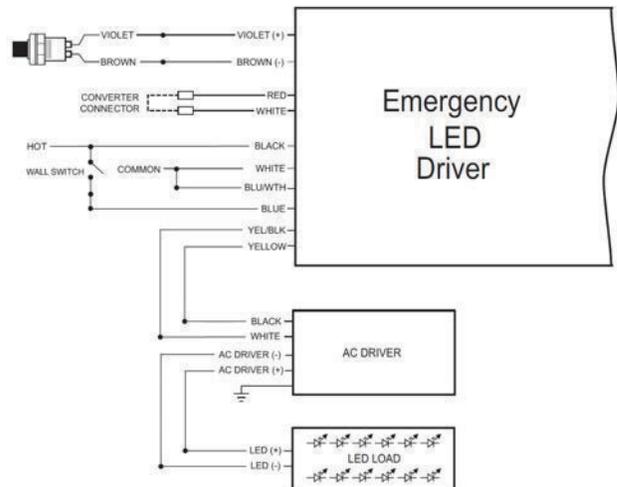

JOB NAME: _____
TYPE: _____
PART #: _____
NOTES: _____
