

Job Name: _____

Type: _____

Part #: _____

Notes: _____

SEEXLPDC LED EXIT SIGN

THIN DIE-CAST ALUMINUM EXIT SIGN

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING


- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
 - Field selectable knockout Chevron directional indicators.
 - Quick-snap face plate closure.
- Specification-grade, low profile, thin aluminum die-cast design.
- Available in single or double face only.



WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

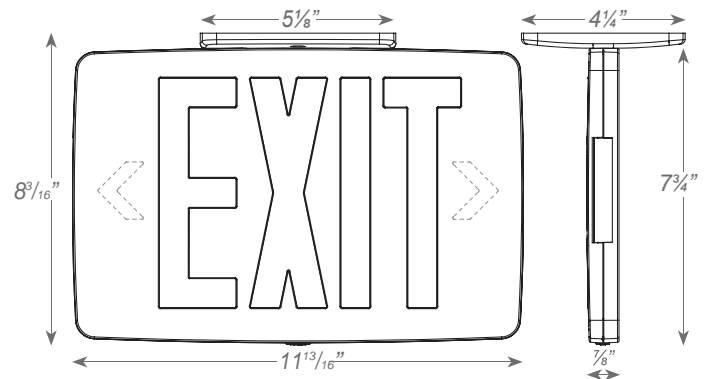

ORDERING INFORMATION

MODEL: SEEXDC

MODEL	No. of FACES	LETTER COLOR	BATTERY	HOUSING COLOR
SEEXLPDC	1 Single Face	R Red	(blank)	W White
	2 Double Face	G Green	EM Battery Backup	B Black A Aluminum