

# OXFORD COLLECTION

## SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L<sub>70</sub>\*
- 5 YEAR WARRANTY
- DIMMABLE
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- ACRYLIC DIFFUSER
- POST TOPS FIT MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS
- STANDARD PACK QTY: 6




RoHS compliant



**FX160**

SHOWN WITH OPTIONAL BRASS TRIM




EXTENDS: 9"  
HCMT: 12 1/4"



**FX159**

1 PIECE BASE  
HCMT: 10 7/8"


SHOWN WITH OPTIONAL BRASS TRIM

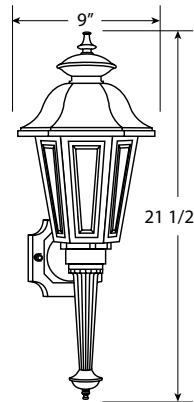

EXTENDS: 9"




**FX259**



**PATENT PENDING**  
EOS LIGHT ENGINE

EXAMPLE # FX160-LE800C-BC

STYLE #	SOURCE/WATTAGE	LUMENS/CCT	BODY	LENS	OPTIONS
FX259 = POST	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR	T = BRASS TRIM
FX159 = LONG FX160 = SHORT	LE800 = 13W POWER INPUT  CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR	P = PHOTOCELL T = BRASS TRIM

LE800 LED REPLACEMENT PARTS	
L08-AC120R-W	= 900 LUMEN 3000K ARRAY
L08-AC120R-C	= 1000 LUMEN 4000K ARRAY

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\* ESTIMATED FROM LED SOURCE



**PROlite LED Lighting™**

A Division of Emergence® Lighting, Inc.