

Job Name: _____

Type: _____

Part #: _____

Notes: _____

SEEMGWL

WET LOCATION SEMIRECESSED MR-16 EMERGENCY UNIT



FEATURES

- Compact, low-profile design in neutral finish
- Fully-gasketed polycarbonate enclosure provides resistance to corrosive atmospheres and non-hazardous environments
- UL Listed for wet locations and meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes Electrical

ILLUMINATION

- Two fully adjustable, ultra bright, round, 7.2W MR-16 halogen lamp heads standard.

ELECTRICAL


- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V, 4.5Ah, sealed acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Surface mount via easy connect back plate

HOUSING

- Injection-molded, engineering grade, V-0 flame retardant, high thermoplastic in neutral gray finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, and hose-down conditions

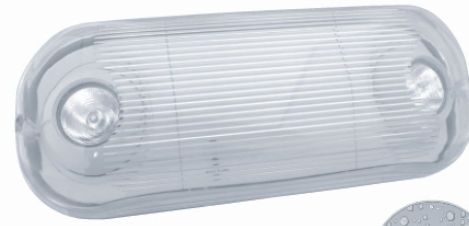


OPTIONS

- Using the optional internal heater (-HTR) enable the unit to be used in cold weather environments (contact customer service)

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery protected for two years.

DIMENSIONS

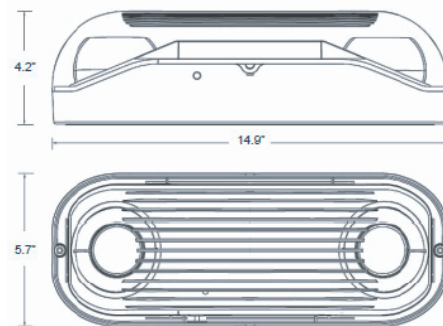

ORDERING INFORMATION

Sample Part Number: **SEEMGWL-G-HTR**

MODEL	HOUSING COLOR	OPTIONS
SEEMGWL	G - Gray	HTR - Internal Heater USA - Assembled in the USA