

PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

FD324

LED MUSHROOM CLOUDS

SPECIFICATIONS



- 120V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)^{70*}
- ESTIMATED 50,000 HRS L
- WHITE POWDERCOATED ALUMINUM BASE AND ACRYLIC DIFFUSER
- CEILING MOUNT ONLY
- UL/CUL LISTED FOR DAMP LOCATION
- DIMMABLE
- STANDARD PACK QTY: 8 (11" MODEL) or 6 (14" MODEL)



**FD321
FD324
MUSHROOM**



**FD311
FD314
DRUM**

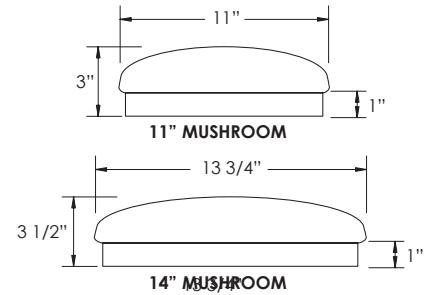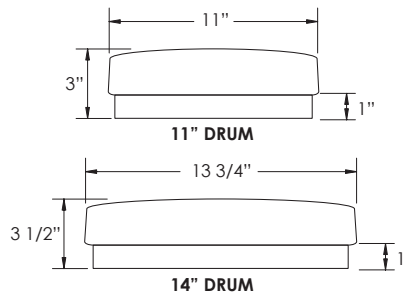

RoHS
compliant

ORDERING INFORMATION: EXAMPLE: FD311-LE800WW

FD				W	W
MODEL		SOURCE WATTAGE	COLOR TEMP	BODY	LENS
FD	311 = 11"DRUM 321 = 11"MUSHROOM 314 = 14"DRUM 324 = 14"MUSHROOM	LE800 = 12W POWER INPUT 800 LUMENS >65 LUMENS PER WATT** LE1200 = 15W POWER INPUT 1200 LUMENS >80 LUMENS PER WATT** LE1800 = 22W POWER INPUT 1800 LUMENS >80 LUMENS PER WATT**	C = 3000K W = 4000K	W = WHITE	W = WHITE

LE800W LED REPLACEMENT PARTS

- L08-AC120R-W = 3000K 1200 LUMEN ARRAY
- L08-AC120R-C = 4000K 1200 LUMEN ARRAY

LE1200W LED REPLACEMENT PARTS

- L12-AC120R-W = 3000K 1200 LUMEN ARRAY
- L12-AC120R-C = 4000K 1200 LUMEN ARRAY

LE1800W LED REPLACEMENT PARTS

- L18-AC120R-W = 3000K 1200 LUMEN ARRAY
- L18-AC120R-C = 4000K 1200 LUMEN ARRAY