



PB4: REVEAL SQUARE BOLLARD

HOUSING

- Extruded aluminum housing with flush mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Sealed Driver Compartment

LENS

- Clear Inner Lens to Seal LED Array

MOUNTING

- Mounting kit with 8" anchor bolts (included).

LUMAFIT LED

- Delivered Lumens: 1,611 (Clear Array Lens)
- CRI: 80+
- CCT: 4000K
- Rated Life: 50,000 Hours
- 5-Year Warranty
- Aluminum Boards

WATTAGE

- Array: 16.6w, System: 19.7w

DRIVER


- Electronic Driver, 120-277V, 50/60Hz
- Dimmable Driver

OPTIONS

- Surge Protection
- Custom Colors Available upon Request


WARRANTY & LISTINGS

- IP67
- Operating Temperatures: -20°C to +40°C

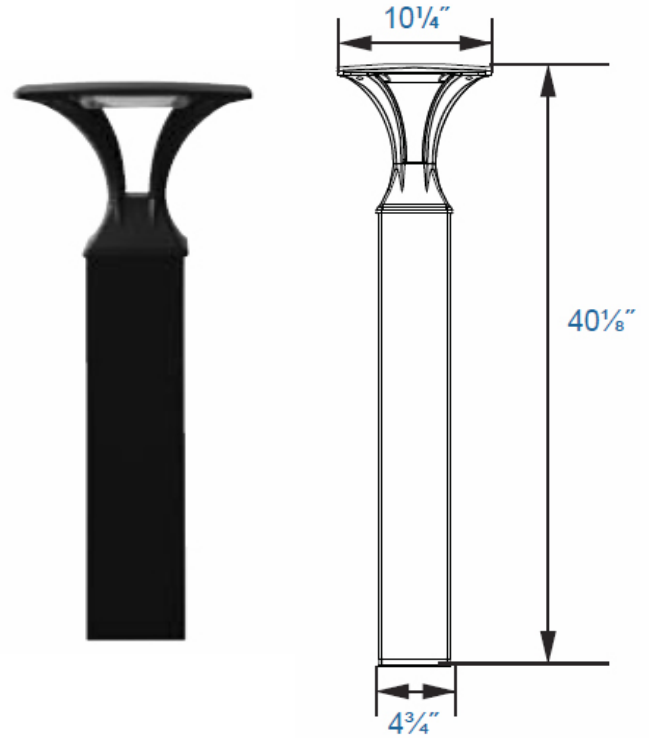


ORDERING INFORMATION: EXAMPLE: PB4QF1X16U4KCZSP

| MODEL | LED | OPTICS | WATTAGE | BALLAST | CCT | LENS | COLOR | OPTIONS |
|-------|--------|----------------------|---------|------------|----------|--------------------|---------------------|---|
| PB4 | Q=QSSI | F=Medium Beam Spread | 16=16W | U=120-277V | 4K=4000K | C=CLEAR ARRAY LENS | Z=BRONZE B=BLACK | SF=SINGLE FUSE DF=DOUBLE FUSE SP=SURGE PROTECTION |



PROlite LED Lighting™

A Division of Emergence® Lighting, Inc. 

TYPE: _____ DATE: _____


JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

OPTIONS



BOLAN

| CATALOG # | DESCRIPTION |
|-----------|---|
| BOLAN4 | MOUNTING KIT, INCLUDES BRACKET & (3) 4" ANCHOR BOLTS |
| BOLAN8 | MOUNTING KIT, INCLUDES BRACKET & (3) 8" ANCHOR BOLTS |
| BOLAN12 | MOUNTING KIT, INCLUDES BRACKET & (3) 12" ANCHOR BOLTS |
| BOLAN15 | MOUNTING KIT, INCLUDES BRACKET & (3) 15" ANCHOR BOLTS |

PHOTOMETRIC

