



# PBOL: EasyLED Dome Stainless Steel Bollard with Louvers

## HOUSING

- Formed 316L Stainless Steel Housing with Flush Mounting Base & Vandal-Resistant Screws, Domed Top, Internal Ballast Tray for Easy Maintenance

## REFLECTOR

- Cast Aluminum Louvers

## LENS

- Clear Polycarbonate Lens

## MOUNTING

- Mounting kit with 8" anchor bolts (included).

## LUMAFIT LED

- Array Lumens: 2,089
- CRI: 83
- CCT: 4000K, 5000K
- Rated Life: 50,000 Hours
- 5-Year Warranty
- Aluminum Boards

## WATTAGE

- Array: 14.5w, System: 17w

## DRIVER


- Electronic Driver, 120-277V, 50/60Hz
- Dimmable Driver

## OPTIONS

- Surge Protection
- Battery Backup
- Bollards Can Be Cut To Custom Lengths Upon Request.


## WARRANTY & LISTINGS

- CSA: Listed for Wet Locations. IP65
- Operating Temperatures: -40°C to +40°C

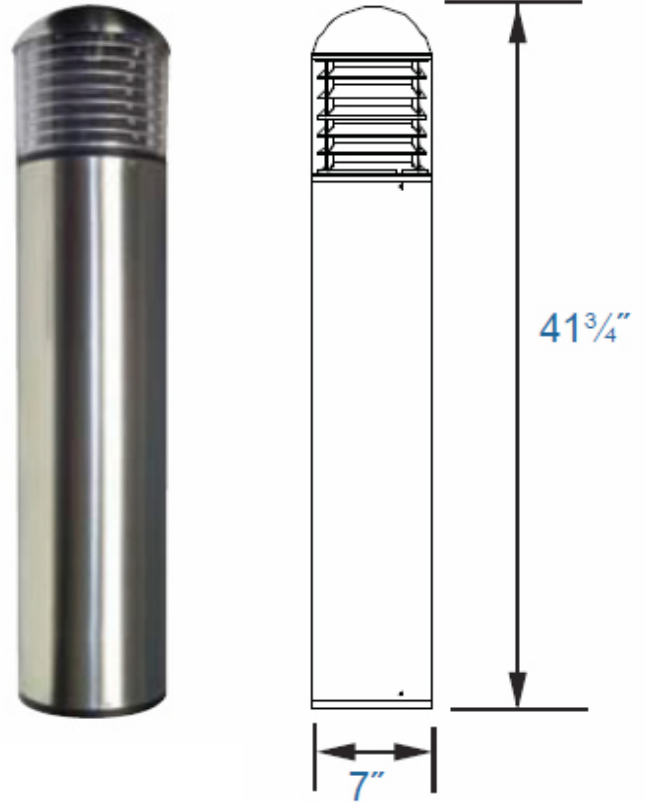

## ORDERING INFORMATION: EXAMPLE: PBOLQF1X15U5KSSSP

MODEL	LED	OPTICS	# OF ARRAYS	WATTAGE	BALLAST	CCT	COLOR	OPTIONS
PBOL	Q=QSSI	F=Medium Beam Spread	1X=One	15=15W	U=120-277V	4K=4000K 5K=5000K	SS=STAINLESS STEEL	SF=SINGLE FUSE DF=DOUBLE FUSE SP=SURGE PROTECTION



# PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_


JOB NAME: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_


CATALOG NO: \_\_\_\_\_

NOTES: \_\_\_\_\_


## OPTIONS



BOLAN



BOLPC



BOLRM



3EBL120277

CATALOG #	DESCRIPTION
BOLAN4	MOUNTING KIT, INCLUDES BRACKET & (3) 4" ANCHOR BOLTS
BOLAN8	MOUNTING KIT, INCLUDES BRACKET & (3) 8" ANCHOR BOLTS
BOLAN12	MOUNTING KIT, INCLUDES BRACKET & (3) 12" ANCHOR BOLTS
BOLAN15	MOUNTING KIT, INCLUDES BRACKET & (3) 15" ANCHOR BOLTS
BOLPC	REPLACEMENT POLYCARBONATE LENS
BOLRM	ROOT MOUNT KIT
3EBL120277	PROVIDES 90 MINUTES OF BACKUP POWER