

**PROlite** LED Lighting™

A Division of Emergensee® Lighting, Inc.



TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

CATALOG NO: \_\_\_\_\_

NOTES: \_\_\_\_\_

# PCP20Q

EasyLED 20" Gas Station Canopy

## HOUSING

- Die Cast Aluminum Housing with IP65 Driver Compartment, White Powdercoat Finish Over a Chromate Conversion Coating.

## WARRANTY & LISTINGS

- CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP65 Sealed LED Compartment.

## LENS

- Tempered Clear Flat Glass Lens

## MOUNTING OPTIONS

- Recessed Mount

## LumaFit LED:

- Delivered Lumens: 27,301
- CRI: 80+
- CCT: 5000K
- Rated Life: 50,000 Hours
- Aluminum Boards

## WATTAGE


- Array: 185.9w; System: 204w

## DRIVER


- Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90.
- Standard Internal Surge Protection 6kV. 0-10V
- Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

## WARRANTY

- 5-Year Warranty for -40°C to +50°C Environment.

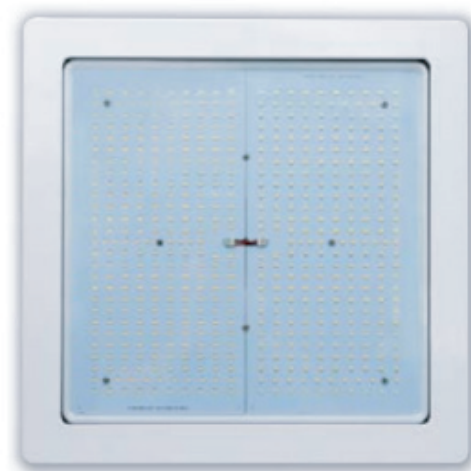

## DIMENSIONS

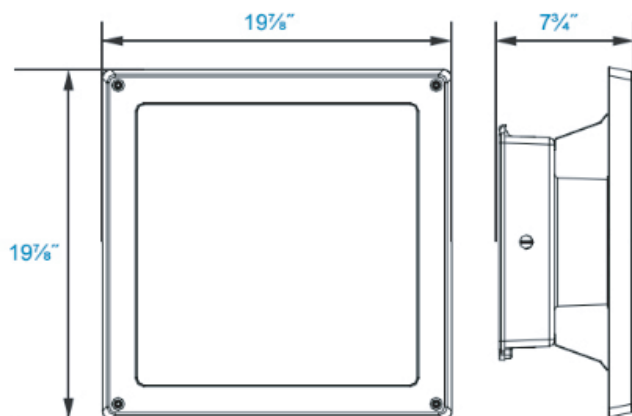

## ORDERING INFORMATION

Example: PCP20QF1X186U5KCWSP

PCP20	Q	V	1X	186		5K	C	W	
MODEL	LED MFR	OPTICS	# OF ARRAYS	WATTAGE	DRIVER	CCT	LENS	COLOR	OPTIONS
PCP20	Q = QSSI	F = Type V	1X = One	186 = 186w	U=120-277V H=347-480V	5K = 5000K	C = Tempered Clear Flat Glass	W = White	SF = Single Fuse DF = Double Fuse SP = Surge Protection

215-512-8100 • Fax 267-288-5604

Four Neshaminy Interplex, Suite 107, Trevose PA 19053  
www.proliteled.com

Specifications subject to change without prior notice.

© 2019, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED