



**PROlite** LED Lighting™

A Division of Emergensee® Lighting, Inc.



TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

CATALOG NO: \_\_\_\_\_

NOTES: \_\_\_\_\_

# PGRPL-10A-C/S LED Bollard

## HOUSING

- Consisting of an extruded aluminum alloy body.
- Standard 4kV surge

## FINISH

- Bronze

## DIFFUSER

- High-impact polycarbonate diffuser

## OPTIONS

- Anodized aluminum reflector

## FEATURES

- -LED compartment is airtight to prevent fogging and condensation build up and keep water out.
- Aluminum reflector designed to reduce glare and produce an even distribution.
- Clear UV resistant polycarbonate lens allows for optimal light transmission and protects the light engine compartment from harsh environments.
- Driver is mounted under the LED compartment for easy replacement and to protect from water, that may accumulate in the base of the bollard.
- Torx security screws secure the LED compartment to the base to deter vandalism.
- Versatile mounting plate allows for easy installation and replacement for any project or development.
- Extruded aluminum tube provides strength and durability as well as protects and conceals the component wiring.
- Terminal block provided on base bracket for easy installation on incoming supply wires.
- Quick disconnect located near the terminal block for simple connection to the LED driver.
- Working temperature: -40°C ~ + 50°C

## LISTINGS

- UL and CUL listed for wet locations
- DLC Premium Listed



PGRPL-10A-S




PGRPL10A-C

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance, ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotels and parks. A solid construction withstands the elements, driver options work in even the worst weather conditions.



## DIMENSIONS

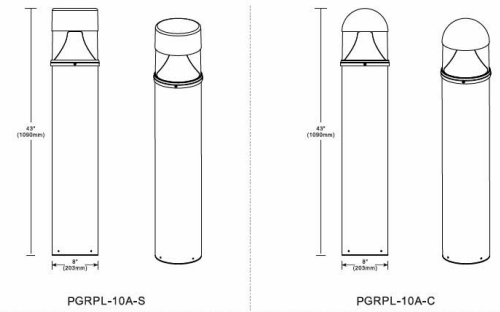


## ORDERING INFORMATION: EXAMPLE: PGRPL-10A018UNV750-XS-C

MODEL	SYSTEM WATTS	INPUT VOLTAGE	CRI	COLOR TEMP	OPTION	FEATURE	FINISH	STARTING TEMP
PEGRPL-10A	18W 36W	UNV=120-277V	7=70+	40=4000K 50=5000K	XS=10kV SURGE 2S=20kV SURGE	S=FLAT TOP C=ROUND TOP	BRONZE	-40°C - +50°C

215-512-8100 • Fax 267-288-5604  
421 Bustleton Pike, Feasterville, PA 19053  
www.proliteled.com

Specifications subject to change without prior notice.  
© 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED



## PERFORMANCE DATA

MODEL	SYSTEM WATTS	DIST. TYPE	LUMENS	LUMENS/WATT	B	U	G
PGRPL-10A-S	18W	TYPE V	2035	111	1	3	2
	36W	TYPE V	3960	110	1	3	2
PGRPL-10A-C	18W	TYPE V	2035	111	1	3	2
	36W	TYPE V	3960	110	1	3	2

## MOUNTING

Versatile mounting holes

