

PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PDCSHM-UD

ROUND UP/DOWN LED WALLPACK LUMINAIRE



FEATURES

UPLIGHT/DOWNLIGHT, HEAVY-DUTY HOUSING

The PDCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens That Provides a Variety of Uplight and Downlight Options

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

PRODUCT APPLICATIONS


- Building Entrances
- Walkways
- Tunnels
- Loading Dock
- Bridges
- Catwalks
- Stairwells



PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY
12W	12.65	3000K	1,530.00	120.95
12W	12.65	4000K	1,606.50	127.00
12W	12.65	5000K	1,686.83	133.35
24W	23.68	3000K	2,802.00	118.33
24W	23.68	4000K	2,942.10	124.24
24W	23.68	5000K	3,089.21	130.46
36W	34.27	3000K	4,203.00	122.64
36W	34.27	4000K	4,413.15	128.78
36W	34.27	5000K	4,633.81	135.21
48W	46.60	3000K	5,604.00	120.26
48W	46.60	4000K	5,884.20	126.27
48W	46.60	5000K	6,178.41	132.58
60W	56.83	3000K	7,005.00	123.26
60W	56.83	4000K	7,355.25	129.43
60W	56.83	5000K	7,723.01	135.90

DIMENSIONS

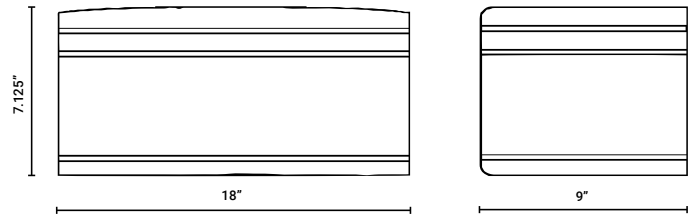

POWER

POWER FACTOR >0.90 - THD <20

MODEL	WATTAGE UP	WATTAGE DOWN	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PDCSHM-UD	12W	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	MS MOTION SENSOR
		24W	30K 3000K - WARM WHITE	WH WHITE	D1 0-10V DIMMING
		36W	35K 3500K - NEUTRAL WHITE	BL BLACK	D2 STEP DIMMING
		48W	40K 4000K - NEUTRAL WHITE	SL SILVER	EM EMERGENCY BATTERY PACK
		60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	V1* 480/347V INPUT (120-277V STANDARD)
		60W	55K 5500K - DAYLIGHT		*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR