

Spec Grade
PROlite LED Lighting

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PB1Q and PB2Q Round & Square EasyLED Bollards



SoftLED

The LEPG PB1Q and PB2Q LED Cutoff Bollards with UV-stabilized polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

Specifications and Features:

Housing: Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat, Dome or Pyramid Tops, Internal Driver Tray for Easy Maintenance.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

Finish: Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Reflector: Reflective White UV-Stabilized Polycarbonate Cone Reflector

Lens: Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens.

Mounting Options: Mounting Kit with 8" Anchor Bolts, Included.

EasyLED LED: Aluminum Boards

Wattage: Array: 23w, System: 27w; (70w HID Equivalent)

Driver: Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.


Controls: Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty: 5-Year Warranty for -20°C to +40°C Environment.

Order Information:



PB1Q - Round Flat Top (Clear Lens)

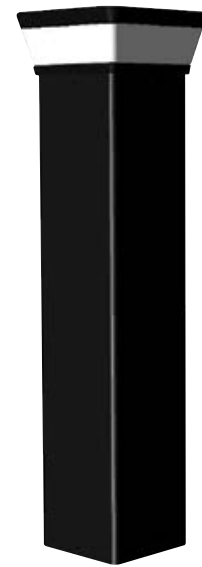

PB2Q - Square Flat Top (LumaLens)



PB2CQ - Square Pyramid Top



PB1BQ - Round Dome Top




Shown with "S3" Sensor




Shown with GFCI

Dimensions

Width (B)	9 1/4" (234mm)
Diameter (D)	7" (180mm)
Height (A)	Flat Top: 35 1/4" (908mm)
	Dome Top: 38 1/4" (968mm)
	Pyramid Top: 38 1/4" (968mm)

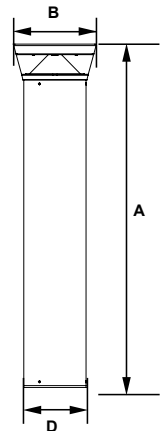

Model	Optic	Wattage	Driver	CCT	Lens	Color	Height	Options
	F=WBS	1X23=23w						
PB1Q=Round Bollard, Flat Top PB1BQ=Round Bollard, Dome Top PB2Q=Square Bollard, Flat Top PB2CQ=Square Bollard, Pyramid Top	F=Wide Beam Spread	1X23=23w	U=120-277V C=347V	3K=3000K* 4K=4000K *B2Q model only.	C=Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens	Z=Bronze B=Black C=Custom (Consult Factory)	(Leave Blank)= 34 1/4" Standard Height 30=30" Height	SF=Single Fuse (120-277V Only) DF=Double Fuse (120-277V Only) SP=Surge Protection GF1=GFCI Outlet, 15A, 120V S3=Internal Microwave Sensor (120-277V Only)




Spec Grade
PROlite LED Lighting

A Division of Emergensee® Lighting, Inc.



TYPE: _____ DATE: _____
 JOB NAME: _____
 CONTRACTOR: _____
 CATALOG NO: _____
 NOTES: _____

Accessories & Replacement Parts:



BOLAN



BREBASE*




P17122



P17121



BORBASE



BOSBASE



BOADP1

**Mounting Accessories
(Order Separately, Field Installed)**

BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPG Bollards. Die Cast with Powdercoat Finish. Hardware Included. 1 1/2" Dia. x 1 1/2" H

*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

**Accessories
(Order Separately, Field Installed)**

P17122	Remote Programming Tool for P17121
--------	------------------------------------

**Replacement Parts
(Order Separately, Field Installed)**

P17121	Internal Microwave Sensor (120-277V Only)
BORBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating. Fits B1.
BOSBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating. Fits B2.
BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPG Round Bollards. Die Cast with Bronze Powdercoat Finish.

*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

*Shown Mounted

Photometric Data

