

Job Name: _____

Type: _____

Part #: _____

Notes: _____

SEEXCWL

WET LOCATION LED EXIT SIGN & INCANDESCENT COMBO

STANDARD



OPTIONAL



ILLUMINATION

- Two fully adjustable 5.4W, glare-free incandescent lamp heads.
- High performance reflector and tempered glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap
- Charge rate/power "ON" LED indicator light and push-to-test-switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

INPUT WATTS (W)		INPUT AMPS (A)	
120V	277V	120V	277V
7.2	7.7	0.063	0.030

MOUNTING

- Mounting hardware provided for back surface wall mount.

HOUSING

- 5VA fl ame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade Silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.

ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your Lighting Representative.

1G.2019

MODEL	# OF FACES	LETTER COLOR	BATTERY	OPTIONS
SEEXCWL	1			HTR
SEEXCWL	1 - Single Face	R - Red G - Green	Blank - AC Only EM - Battery Backup	HTR - Internal Heater




OPTIONS

- HTR: Optional internal heater for cold temperature applications.

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Batteries pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

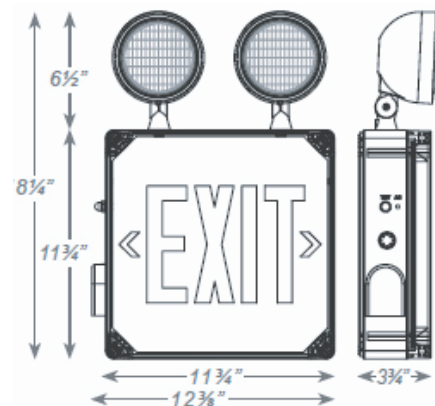

Sample Part Number: **SEEXCWL**