

Spec Grade
PROlite LED Lighting

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PCV304

LED CANOPY LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The PCV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING


The PCV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS

- Building Canopy Parking
- Garages Tunnels
- Storage Facilities
- Gas Stations

PRODUCT DIMENSIONS

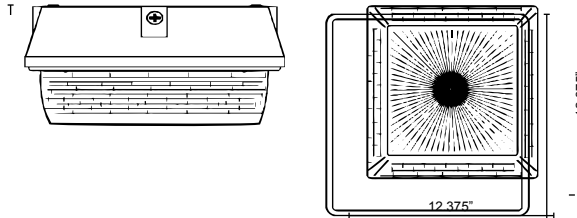

POWER

POWER FACTOR >90 - THD <20



PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	TESTED WATTAGE	CCT	LUMENS	EFFICACY
12W	12.00	3000K	1,370	114.17
12W	12.00	4000K	1,439	119.92
12W	12.00	5000K	1,510	125.83
24W	23.68	3000K	2,740	115.71
24W	23.68	4000K	2,877	121.49
24W	23.68	5000K	3,021	127.58
36W	34.27	3000K	4,110	119.93
36W	34.27	4000K	4,315	125.91
36W	34.27	5000K	4,531	132.21
48W	46.70	3000K	5,480	117.34
48W	46.70	4000K	5,754	123.21
48W	46.70	5000K	6,042	129.38
60W	58.59	3000K	6,850	116.91
60W	58.59	4000K	7,193	122.77
60W	58.59	5000K	7,552	128.90
72W	67.11	3000K	8,220	122.49
72W	67.11	4000K	8,631	128.61
72W	67.11	5000K	9,063	135.05

ORDERING GUIDE

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
PCV304				
	12W	27K 2700K - WARM WHITE	BZ BRONZE (STANDARD)	PC1 120V PHOTOCELL
	24W	30K 3000K - WARM WHITE	WH WHITE	PC2 208/277V PHOTOCELL
	36W	35K 3500K - NEUTRAL WHITE	BL BLACK	MS MOTION SENSOR
	48W	40K 4000K - NEUTRAL WHITE	SL SILVER	D1 0-10V DIMMING
	60W	50K 5000K - COOL WHITE	CC CUSTOM COLOR	D2 STEP DIMMING
	72W	55K 5500K - DAYLIGHT		EM EMERGENCY BATTERY PACK
				V1* 480/347V INPUT (120-277V STANDARD)

*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR