

PTTL LED

LED INDOOR ARCHITECTURAL INDIRECT TROFFER



APPLICATION

The PTTL LED luminaire designed with a unique yet simple transparent optics offer minimalist design to support broad range of solutions with superior optical and energy performance. Built with field adjustable wattage and color temperature to suit varies applications including commercial, educational and healthcare environments, general office, and retails.

MOUNTING:

- Recessed mount.

LED:

- High quality array LEDs.
- Color Rendering Index: >80
- Field adjustable color temperature: 3000/3500/4000(K)
- Field adjustable wattage: 30/35/40W for 2x2, 30/40/50W for 2x4
- L70 >50,000 hrs

FINISH:


- White finish.

CONFIGURATIONS


Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
PTTL LED	2x2	L30/35/40	30/35/40W	3000 lm, 3500 lm, 4000 lm	100 lm/W
	2x4	L30/40/50	30/40/50W	3000 lm, 4000 lm, 5000 lm	

ORDERING INFORMATION

MODEL	LED	PRESET	OPTIONS
PTTL22-30/35/40KUNVR	L30/35/40	30/35/40W LED	REM8 Remote EM 8W REM16 Remote EM 16W REM25 Remote EM 25W
PTTL24-30/35/40KUNVR	L30/40/50	30/40/50W LED	
		(Blank) Non-Preset PS Preset Request * Factory default setting: 22-L40-35K, 24-L50-35K	

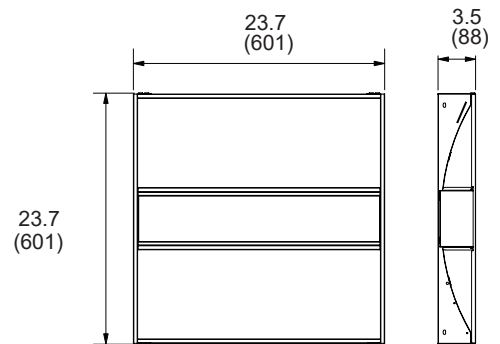


All dimensions are in inches (millimeters).

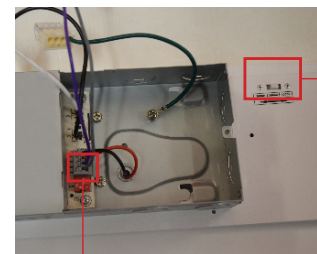

Field Adjustable CCT


Adjustable Power




COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Lutron>	Diva DDTV


PTTL-22-L30

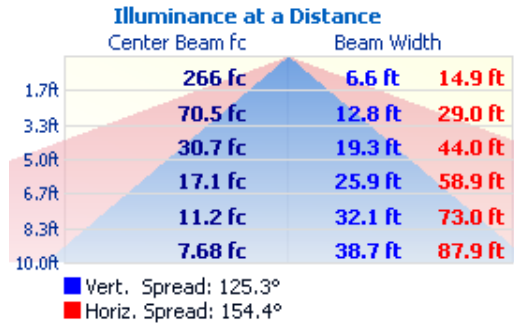


PTTL-22-L35

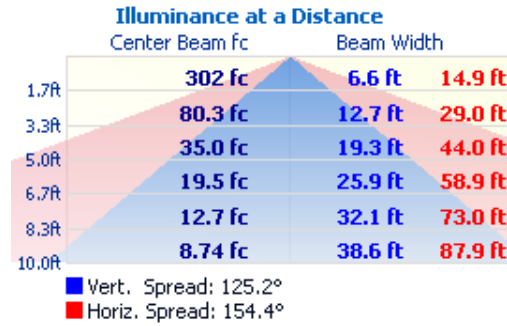

PTTL-22-L40

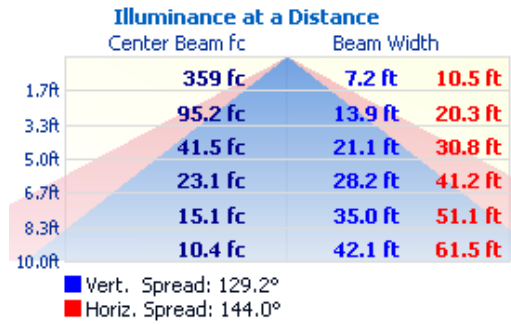

PTTL-24-L30

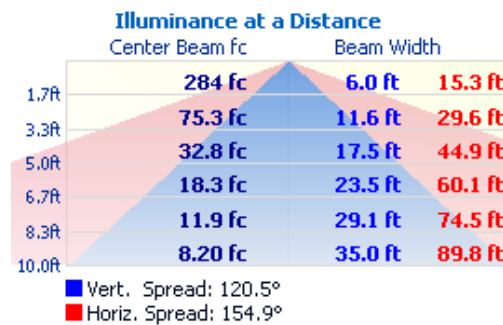

PTTL-24-L40

