

PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: _____

Type: _____

Part #: _____

Notes: _____

PBRK-LED350

3.5" LED Trims

STANDARD



FEATURES

Available in 3000k and 4000k color temperatures.*

Long-life LEDs provide at least 70% of initial lumen output (L₇₀) for 50,000 hours of operation.**

Provides at least 560 nominal lumens.

9 nominal watts.

Color rendering index (R_a) > 90.

120 AC voltage is standard.

Dimmable down to 10% with most line voltage dimmers.

Die-cast housing painted white.

Easy installation in new construction or remodel applications.

Equipped with torsion springs.

E26 medium screw-base (Edison) connector comes standard.

Compatible with 3.25-3.5" ceiling cut-outs.

Compatible with BL350 series.

This device is not intended for use with emergency exits.

WARRANTY & LISTINGS

cULus listed for damp and wet locations.

Energy Star qualified.


Title 24 compliant.

Complies with RoHS (Restriction on Hazardous Substances) requirements.

5-year warranty of all electronics and housing.

Contact factory for other color temperatures and lumen packages.
L₇₀ hours are IES TM-21-11 calculated hours.

DIMENSIONS

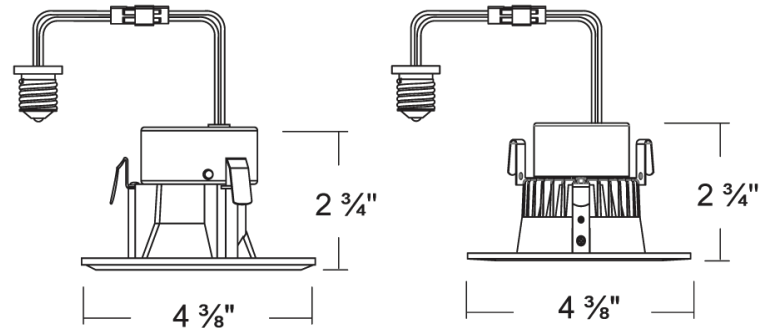

ORDERING INFORMATION

MODEL	DESCRIPTION
PBRK-LED350-BW-3K	3.5" LED ROUND BAFFLE TRIM, 3000K
PBRK-LED350-BW-4K	3.5" LED ROUND BAFFLE TRIM, 4000K
PBRK-LED350-BWSQ-3K	3.5" LED SQUARE BAFFLE TRIM, 3000K