

## PBRK-LED6ICN

6" LED Trims – Self Contained

### STANDARD




### FEATURES

- Available in 2700K, 3000k, 3500K, 4000K, and 5000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L<sub>70</sub>) for 50,000 hours of operation.\*\*
- Provides 850 nominal lumens.
- 9.5 nominal watts.
- Color rendering index (R<sub>a</sub>) > 80.
- 120 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or retrofit applications. Equipped with torsion springs.
- Rated for insulated, non-insulated, and air-tight applications.
- Type IC. Access above ceiling required.
- Compatible with 5.75" ceiling cut-outs.
- This device is not intended for use with emergency exits.

### COMPATIBLE DIMMERS

MANUFACTURER & SERIES	PART NUMBER
Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6
Lutron Diva	DV600P
Lutron Diva	DVCL-153P

### DIMENSIONS

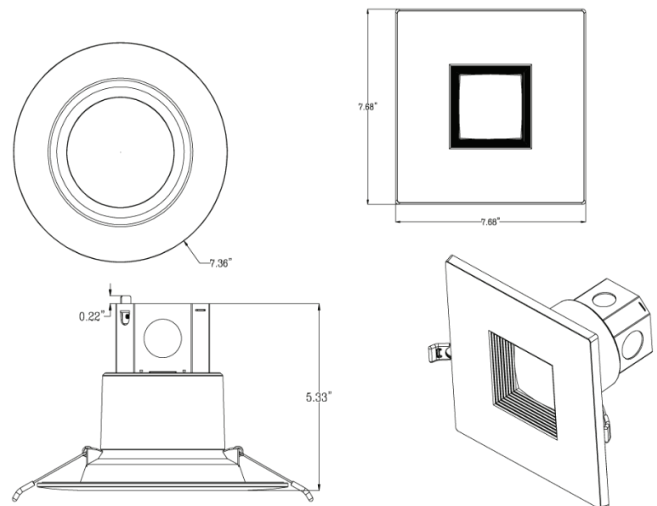

### WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.  
 \*\* L<sub>70</sub> hours are IES TM-21-11 calculated hours.

### ORDERING INFORMATION

Example: PBRK-LED6ICN-9.5W-27K-ECO

Series	Watts	Color Temperature		Accessories (Order Separately)	
PBRK-LED6ICN	9.5W	27K-ECO	2700K	LED56-TRMPLT-ECO-SQ	Square snap trim
		3K-ECO	3000K	LED6A-TRMPLT-ECO-SPWHT	Specular white snap trim
		35K-ECO	3500K	LED56-TRMPLT-ECO-BK	Black snap trim
		4K-ECO	4000K	LED56-TRMPLT-ECO-N	Nickle snap trim
		5K-ECO	5000K	LED56-TRMPLT-ECO-BZ	Bronze snap trim