

Job Name: _____

Type: _____

Part #: _____

Notes: _____

PFL148

LYNX




FEATURES:

- Available in Dedicated LED
- Polycarbonate Body & Diffuser with Cast Aluminum Base
- Photocell Included
- Enclosed & Gasketed
- ETL Listed for Wet Locations (IP65) Standard Pack QTY: 1



DIMENSIONS:

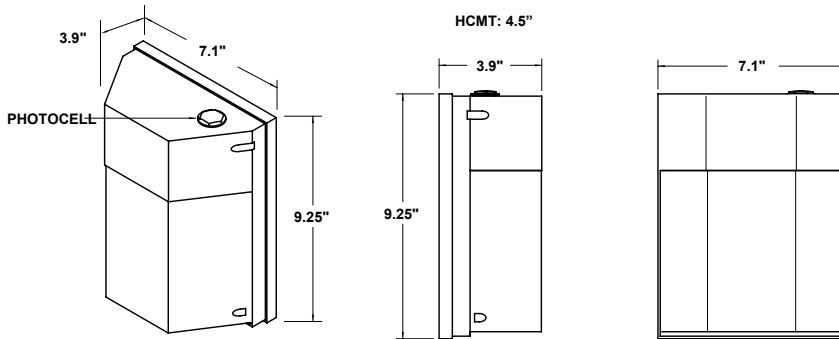

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFL148		Z-Bronze		M-Motion Sensor
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800-13W, 80 CRI >98 Lumens Per Watt**	C-1280lm 4000K	POLYCARBONATE F- Glare Free Frost	(not Energy Star qualified) Photocell Included Standard