

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## HATCH COLLECTION




RoHS compliant



## SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE  
-40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L
- 5 YEAR WARRANTY
- DIMMABLE
- ACRYLIC DIFFUSER
- MOLDED OF DURABLE NON-CORROSIVE  
UV RESISTANT RESINS
- STANDARD PACK QTY: 3
- POST TOPS FIT MOST 3 INCH DIAMETER  
POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS




EXTENDS: 8 1/2"  
HCMT: 13 1/4"


**PFR112**



**PFR113**

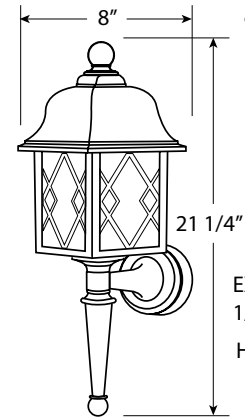


EXTENDS: 8 1/2"  
HCMT: 13 1/4"



EXTENDS: 8 1/2"  
HCMT: 2 3/4"

**PFR111**



**PFR211**



## ORDERING INFORMATION

STYLE #	SOURCE/WATTAGE	LUMENS/CCT	BODY	LENS	OPTIONS
PFR211 = POST	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT	W = 900lm 3000K ** C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR F = FROSTED	
PFR111 = PETITE PFR112 = SHORT PFR113 = LONG	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT	W = 900lm 3000K ** C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR F = FROSTED	P = PHOTOCELL

LE800 LED REPLACEMENT PARTS	
L08-AC120R-W	= 900 LUMEN 3000K ARRAY
L08-AC120R-C	= 1000 LUMEN 4000K ARRAY

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\* ESTIMATED FROM LED SOURCE