

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## KINGSTON COLLECTION



RoHS compliant




### SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE  
-40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L
- 5 YEAR WARRANTY
- DIMMABLE
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- POST TOPS FIT MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS
- ACRYLIC DIFFUSER
- STANDARD PACK QTY: 6



**PFK142**

SHOWN WITH  
OPTIONAL  
BRASS TRIM




EXTENDS: 8 1/2"  
HCMT: 12 7/8"



**PFK141**


1 PIECE BASE  
HCMT: 12 7/8"

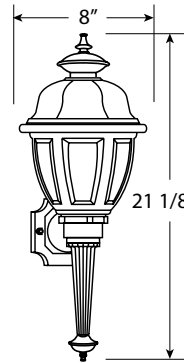

EXTENDS: 8 1/2"



**PFK241**



### ORDERING INFORMATION

STYLE #	SOURCE/WATTAGE	LUMENS/CCT	BODY	LENS	OPTIONS
PFK241 = POST	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR W = WHITE	T = BRASS TRIM
PFK141 = LONG PFK142 = SHORT	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR W = WHITE	P = PHOTOCELL T = BRASS TRIM

LE800 LED REPLACEMENT PARTS	
L08-AC120R-W	= 900 LUMEN 3000K ARRAY
L08-AC120R-C	= 1000 LUMEN 4000K ARRAY

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\* ESTIMATED FROM LED SOURCE