

Job Name: _____

Type: _____

Part #: _____

Notes: _____

PAVP LED SERIES

Aluminum Lighting for Marine and Wet



Designed to meet the rugged demands of highly corrosive industrial applications, the PAVP Series is vapor-tight and enclosed and gasketed fixture. It's rugged construction precludes contamination by dirt, moisture and chemicals and is suitable for indoor and outdoor applications.

FEATURES

- Enclosed and Gasketed
- High lumen output in a compact luminaire
- Total Lumens: 1598
- Rugged 5/32" thick housing
- Heat Resistant, Glare-reducing frosted globe
- Field replaceable LED circuit boards and drivers with quick disconnects
- No external fins
- Standard protective guard
- Body: A360 aluminum (less than .4% copper content)
- with baked-on gray epoxy finish
- Guard: A360 aluminum (less than .4% copper content) with baked-on gray epoxy finish
- Gasket: One-piece silicone
- Lens: Borosilicate glass
- Hardware: Stainless steel
- Suitable for indoor or outdoor use
- Suitable for hose-down
- Suitable for commercial and industrial uses only
- 3/4" NPT Hubs
- Dimmable (0-10V), Dimming driver optional
- Ambient Temperature Range: -20°C to +50°C
- Standard CCT - 4000K
- Ballast Voltage: 120-277V 50/60 HZ

WARRANTY & LISTINGS

- UL 1598A
- UL 1598 Wet Locations
- CUL
- UL 8750
- NEMA 3, 4 & 4X

ORDERING INFORMATION:

MODEL	LAMP WATTS	BALLAST VOLTAGE	GLOBE	GUARD	MOUNT	COLOR TEMP OPTIONS
PAVP = Marine PAVPD = Wet and Damp Locations	18L2 = 18 Watt	U = 120-277V 50/60 HZ	HF = Heat Resistant Frosted Glass Globe	G = Guard	P = Pendant W = Wall Mount w/ Box C = Ceiling	30 = 3000k 35 = 3500k 50 = 5000k



MOUNTING OPTIONS

Pendant Mount




Wall Mount




Ceiling Mount



DIMENSIONS

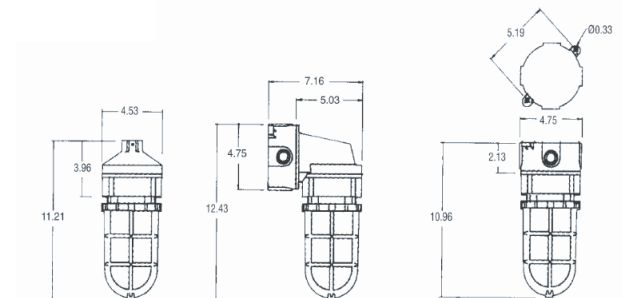




Job Name: _____

Type: _____

Part #: _____

Notes: _____


CHARTS AND PHOTOMETRIC DATA

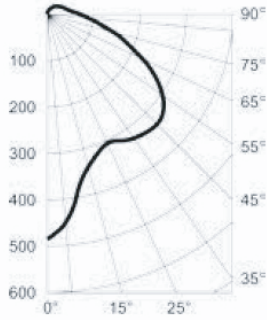


Total Lumens	1598
Input Power (Watts)	17.9
Efficacy	89.7
CRI	82.6
CCT	4010


ACCESSORIES

Globe

	Type	Color	Thread Diameter	Catalog Number
	Heat Resistant Tempered Glass	Frosted	3-5/16 in.	PVGL100HRFRSTD

Guard

	Description	Catalog Number
	Cast Aluminum Guard	P59030AMPG



PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: _____

Type: _____

Part #: _____

Notes: _____