

SEEDLX50

INDOOR | EXPLOSION PROOF | LEED POINTS QUALIFIED



Specifications: Internal

SEEDLX50 is 100% reliable, there are no internal parts to fail. It is a non-toxic, non-radioactive low profile exit solution. The SEEDLX50 is visible at up to 50 feet.

Specifications: External

Construction: ABS plastic with photoluminescent panel. SEEDLX50 can be used for high and/or low level installations and has a 25 year life expectancy. It is visible at 50 feet during a blackout condition. The SEEDLX50 meets building codes, NFPA Life Safety Code 101 and OSHA requirements; International Building Code 2009/2018; International Fire Code 2009/2018. Universal bracket allows for ceiling and flag mount installation.

Specifications: Electrical

CIRCUIT: Since there is no electricity required, the SEEDLX50 is a safer signage solution, which saves on maintenance and energy costs.


INSTALLATION: Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

Specifications: Mechanical

The SEEDLX50 series utilizes photoluminescent technology which absorbs and stores ambient light. It is a non-toxic, and non-radioactive low profile emergency lighting solution. The SEEDLX50 features field adjustable chevrons and is constructed of ABS plastic with photoluminescent panel. The SEEDLX50 is NON-TOXIC and NON-RADIOACTIVE which eliminates disposal fees.

Warranty

The SEEDLX50 Series comes with a 10 year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

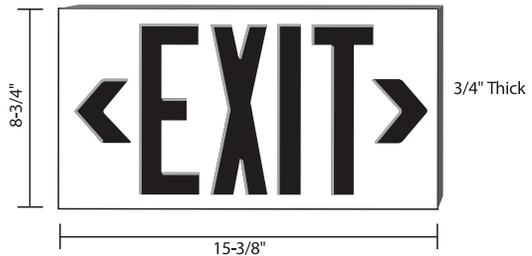

Ordering Logic

| Series | Face No. | Frame Color | Lettering Outline | Mounting |
|----------|-------------|------------------------|-------------------|---------------------------------|
| SEEDLX50 | P1 (single) | R (red) ¹ | G (green) | UB (universal mounting bracket) |
| | | G (green) ¹ | R (red) | |
| | P2 (double) | B (black) ¹ | | |
| | | W (white) ² | | |

NOTE 1: Lettering outline not available.

NOTE 2: White frame must specify Red or Green letter outline.

EXAMPLE: SEEDLX50-P1-W-G-UB

DESCRIPTION: SEEDLX50 single face, white frame, green outline letters, universal mounting bracket