

Job Name: _____

Type: _____

Part #: _____

Notes: _____

SEE1400ACTD

FLUORESCENT EMERGENCY BALLAST 1400 LUMENS

STANDARD | OPTIONAL



ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one or two lamps in the emergency mode for a minimum of 90 minutes.
- Provides a maximum initial lumen output of 1400 lumens.

ELECTRICAL

- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects to the internal battery to fluorescent lamp(s) for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

HOUSING


- Durable painted steel construction in a white finish.
- Compact design fits most fluorescent fixtures.

OPTIONS

- CEC: Certified to CEC under Title 20 regulations

LAMP COMPATIBILITY CHART

LAMP	INITIAL LUMENS		LAMP	INITIAL LUMENS		LAMP	INITIAL LUMENS	
	1-LAMP	2-LAMP		1-LAMP	2-LAMP		1-LAMP	2-LAMP
T5 14W	1100	1200	T12 20W	700	800	4-Pin PL CF 26W	1000	1100
T5 21W	1150	1250	T12 40W	850	900	4-Pin PL CF 3 2W	1050	1150
T5 28W	1250	1300	T12 110W	1350	N/A	4-Pin Long CF 18W	900	1050
T5HO 39W	1300	N/A	T12 215W	1400	N/A	4-Pin Long CF 24W	1100	1150
T5HO 54W	1350	N/A	4-Pin PL CF 13 W	825	900	4-Pin Long CF 3 6W	1200	1250
T8 17W	1050	1200	4-Pin PL CF 18W	975	1100	4-Pin Long CF 40W	1250	N/A
T8 32W	1350	1400				4-Pin Long CF 50W	1250	N/A

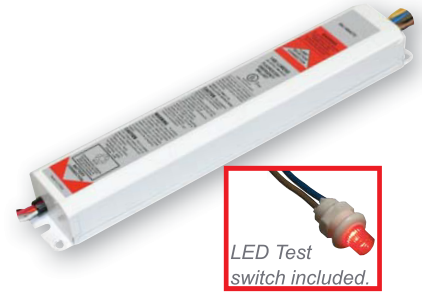


WARRANTY / LISTING

- Five year warranty against defects in material and workmanship (lamps excluded)
- Meets UL924, NFPA 101 Life Safety, NEC, OSHA, Local and State Codes.
- UL listed for damp locations

LAMP COMPATIBILITY

- Compatible with most one-,two-,three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one or two T5, T5HO, T8, T12, 4-pin CFL and long CFL lamps in emergency mode. Refer to the chart below for a list of compatible lamps.

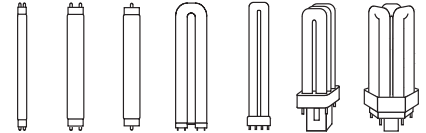

DIMENSIONS

