

America's Leader in Life-Safety Lighting Products

JOD Name.		
Туре:		
Part #:		
Notes:		

# **SEESXTU**

STEEL EXIT SIGN

STANDARD











#### Illumination

 Ultra bright, energy efficient, long life Red or Green LEDs.

## **Electrical**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-totest switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting

- · Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## Housing

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout Chevron directional indicators.

## **Options**

 SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.




## Warranty/ Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).

Joh Nomes

· Certified to CEC under Title 20 Regulations.

## **Dimensions**

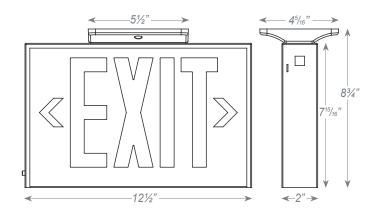

### **Ordering Information**

#### SEESXTEU

MODEL	No. of FACES		LETTER COLOR		JSING COLOR	BATTERY		OPTIONS	
SEESXTEU	2 Universal Single/Double Face	R G	Red Green	W B	White Black	(blank) EM	Battery Backup	SDT	Self-Diagnostics <sup>1</sup>

<sup>1</sup> Available only with EM units.