

SESEECALDCXTEU

Chicago Approved Steel LED Exit & Emergency Combo

STANDARD



ILLUMINATION

- Long lasting, energy efficient white LED exit sign illumination.
- Single or double face configuration.
- Two 6V 5.3W adjustable white LED lamp heads.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 120 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity 10W available.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING


- Durable 20-gauge steel construction.
- Neutral white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (20°C – 50°C).



DIMENSIONS

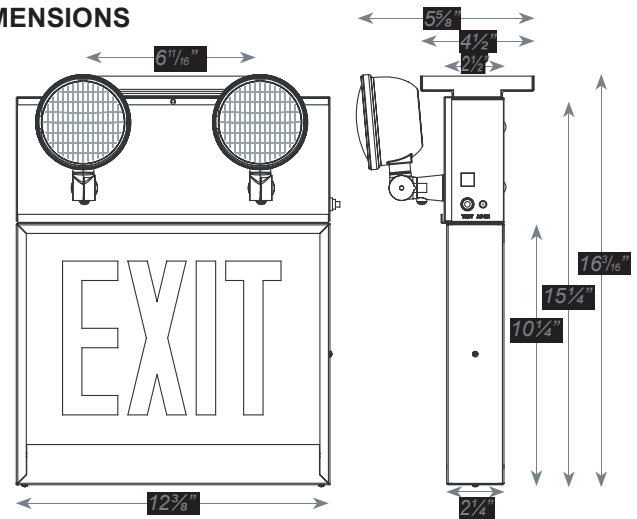

Sample Part Number: **SECEALDCXTEU-1-R-W**

											W			
MODEL	No. of FACES		LETTER		HOUSING		OPTIONS		SIGNAGE		DIRECTIONAL ARROW			
SECEALDCXTEU	1	Single Face	R	Red	W	White	RC	Remote Capacity	BLANK	Exit	NA	Exit No Arrow	SWLA ¹	Stairs Left Arrow
	2	Double Face			B	Black			SW	Stairs	DA	Exit Double Arrow	SWNA	Stairs No Arrow
<p>Notes:</p> <p>1. Available only with single face units.</p> <p>2. Available only with double face units.</p>											RA ¹	Exit Right Arrow	SWDA	Stairs Double Arrow
											LA ¹	Exit Left Arrow	SWRA ¹	Stairs Right Arrow
											LARA ²	Exit Left/Right Arrow	SWLARA ¹	Stairs Left/Right Arrow

Notes:

1. Available only with single face units.
2. Available only with double face units.

10.2019



America's Leader in Life-Safety Lighting Products

Job Name:

Type:

Part #:

Notes:

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
SEECALEDXTEU	12	13	0.12A	0.06A
SEECALEDXTEU-RC	12	13	0.12A	0.06A