

# SEECEU

## Low Profile All LED Exit & Emergency Combo

### ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap thermoplastic mounting canopy included –provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

### OPTIONS

- SPV: UL Listed for special voltage option.
  - HL: Provides increased center-to-center spacing (2.0W per head).
  - SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

### WARRANTY / LISTING

- 5 year warranty on all electronics and housing. Battery prorated for 5 years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.


#### STANDARD



#### OPTION



### DIMENSIONS

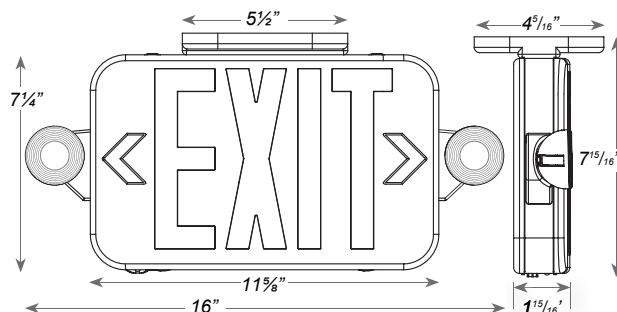

## ORDERING INFORMATION

Sample Part Number: **SEECEU3RW**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
SEECEU	3	Universal Single/Double Face		
		R Red	W White	RC Remote Capacity <sup>1</sup>
		G Green	B Black	HL High Lumen LED <sup>1</sup>
		RG Red/Green		SDT Self-Diagnostics <sup>2</sup>
				SPV 120/230 Volt 50/60Hz <sup>2</sup>

#### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

<sup>2</sup> Not available with RG units.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
SEECEU RG	1.2	N/A	1.2	0.12	N/A	0.12
SEECEU RG RC/HL	1.2	N/A	1.2	0.12	N/A	0.12
SEECEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12
SEECEU RED/GREEN RC/HL	1.2	1.2	1.2	0.12	0.12	0.12
SEECEU RED SDT	2.5	-	2.5	0.05	-	0.05
SEECEU RED SDT RC/HL	3.0	-	3.0	0.05	-	0.05
SEECEU GRN SDT RC/HL	2.7	-	2.7	0.05	-	0.05

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY											
			RHLED	MRHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED
			MV			6V	12V	6V	12V	6V	12V	6V	12V	
SEECEURC	3.6V	1W	x	x										
SEECEUHL	3.6V	0.5W		x										