

Job Name: _____

Type: _____

Part #: _____

Notes: _____

SEEXC

LED EXIT/INCANDESCENT EMERGENCY COMBO



ILLUMINATION

- Standard with two 5.4 watt tungsten fully adjustable, glare-free incandescent emergency lighting heads
- High-performance smooth thermoplastic reflector and plastic lens for optimal light distribution
- Ultra bright, energy efficient, long-lasting Red or Green LED (exit sign illumination)

ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

HOUSING

- Injection-molded, engineering-grade, V-O flame retardant, high-impact thermoplastic in white or black finish


ORDERING INFORMATION



WARRANTY & LISTINGS

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

DIMENSIONS

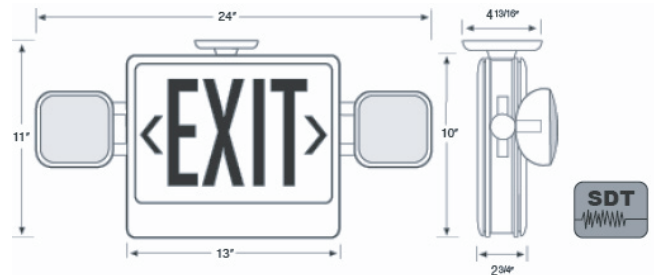

Sample Part Number: **SEEXC-U2-R-W-SDT**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
SEEXC	U2			
SEEXC	U2 - UNIVERSAL SINGLE/DOUBLE	R - RED G - GREEN	W - WHITE B - BLACK	SDT - Self Diagnostics RC - Remote Capable (22W Total) KR9 - 9 W Krypton Lamps (RC Only) KR5 - 5.4 W Krypton Lamps HTR - Internal Heater USA - Assembled in the USA

NOTE: Product specifications subject to change without notice. Updated 08.2017