

CAMBRIDGE COLLECTION




SPECIFICATIONS


- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- ESTIMATED 50,000 HRS L
- 5 YEAR WARRANTY
- DIMMABLE
- ACRYLIC DIFFUSER
- STANDARD PACK QTY: 1
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- POST TOPS FIT MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS




PFC159

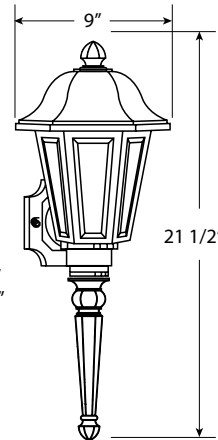

PFC160

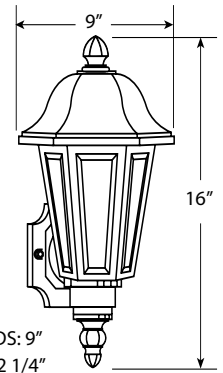

PFC259



ORDERING INFORMATION:

| STYLE # | SOURCE/WATTAGE | LUMENS/CCT | BODY | LENS | OPTIONS |
|---------------------------------|---|---|------------------------|-----------|---------------|
| PFC259 = POST | LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT ** | W = 900lm 3000K C = 1000lm 4000K | B = BLACK W = WHITE | C = CLEAR | |
| PFC159 = LONG PFC160 = SHORT | LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT ** | W = 900lm 3000K C = 1000lm 4000K | B = BLACK W = WHITE | C = CLEAR | P = PHOTOCELL |

| LE800 LED REPLACEMENT PARTS | |
|-----------------------------|--------------------------|
| L08-AC120R-W | = 900 LUMEN 3000K ARRAY |
| L08-AC120R-C | = 1000 LUMEN 4000K ARRAY |

* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST
 ** ESTIMATED FROM LED SOURCE