

# PDC010D

## Ceiling Fixture, CEC Listed

### Features

#### Housing

Die-formed Cold-rolled Steel  
 Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze

#### Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

#### Electrical

LED Driver: 120V Triac Dimming Type or 120V ~ 277V, 0 ~ 10V Dimming Type  
 Min. Dimming Level: 3%  
 High Power Factor ( > 0.98), Low THD ( < 10%)

#### Lamp


LED Type: Built-in  
 LM80, TM21 : 60,000 hours Rating  
 LED CRI > 90 per JA8 Standard  
 Flicker Free: Meets JA10 Standard

#### Certifications

ETL/cETL Listed, CEC Listed Meets T24 JA8

#### Warranty

5 Years Warranty on Driver and LED Module

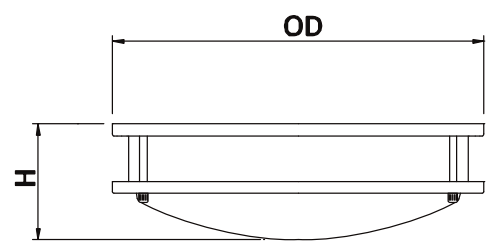

### LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	CRI	Dimming	Finish	Dimension (OD X H)	Energy Star
PDC010D-2G-11W(JA8)	120V	11W	3000K	850	>90	TRIAC	Satin Nickel	10.4" x 4.2"	---
PDC010D-2G (JA8)	120V	18W	3000K	1200	>90	TRIAC	Satin Nickel	10.4" x 4.6"	---
PDC010D-2G (JA8)	120V	18W	3000K	1310	>90	TRIAC	Satin Nickel	11.8" x 4.2"	---
PDC014D-2G (JA8)	120V-277V	24W	3000K	2000	>90	0-10V	Satin Nickel	14.5" x 4.6"	---
PDC016D-2G (JA8)	120V-277V	30W	3000K	2300	>90	0-10V	Satin Nickel	16.0" x 4.9"	---