

Spec Grade
PROlite LED Lighting

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PDC200-90 CUT-OFF LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING

The PDC200-90 is a Large 18" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments


EASY TO INSTALL MOUNTING

The PDC200-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE VS DISTRIBUTION OPERATING TEMPERATURE -20C TO 40C
0C - 40C with EM Pack Option

PRODUCT APPLICATIONS:

- Building
- Entrances
- Walkways
- Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

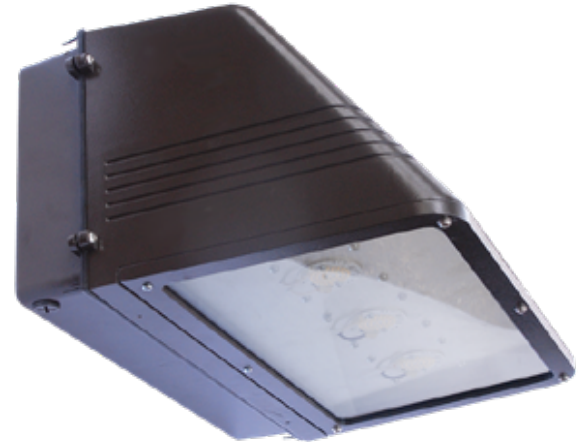

PRODUCT SPECIFICATIONS:

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,008.38	116.96	PREMIUM
36W	34.27	4000K	4,208.79	122.81	PREMIUM
36W	34.27	5000K	4,419.23	128.95	PREMIUM
48W	45.80	3000K	5,344.50	116.69	PREMIUM
48W	45.80	4000K	5,611.73	122.53	PREMIUM
48W	45.80	5000K	5,892.31	128.65	PREMIUM
60W	56.83	3000K	6,680.63	117.55	PREMIUM
60W	56.83	4000K	7,014.66	123.43	PREMIUM
60W	56.83	5000K	7,365.39	129.60	PREMIUM
72W	67.65	3000K	8,016.75	118.50	STANDARD
72W	67.65	4000K	8,417.59	124.43	STANDARD
72W	67.65	5000K	8,838.47	130.65	STANDARD
84W	80.12	3000K	9,352.88	116.74	STANDARD
84W	80.12	4000K	9,820.52	122.57	STANDARD
84W	80.12	5000K	10,311.54	128.70	STANDARD
96W	91.65	3000K	10,689.00	116.63	STANDARD
96W	91.65	4000K	11,223.45	122.46	STANDARD
96W	91.65	5000K	11,784.62	128.58	STANDARD

ORDERING GUIDE:

MODEL	WATTAGE	COLOR TEMPERATURE	HOUSING COLOR	OPTIONS & ACCESSORIES
PDC200-90	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS 48W 48 WATTS 60W 60 WATTS 72W 72 WATTS* 84W 84 WATTS* 96W 96 WATTS*	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	PC1 120V PHOTOCELL PC2 208/277V PHOTOCELL MS MOTION SENSOR MS-D2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) EM EMERGENCY BATTERY PACK V1* 480/347V INPUT (120-277V STANDARD) *NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR