

Job Name: _____

Type: _____

Part #: _____

Notes: _____

PFE Series RESIDENTIAL EUROSTYLE



RoHS compliant




FEATURES:


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Location
- Standard Pack QTY: 6




PFE101

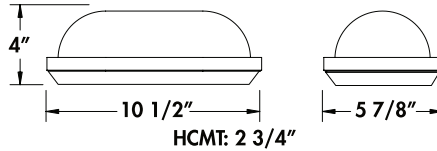


PFE102

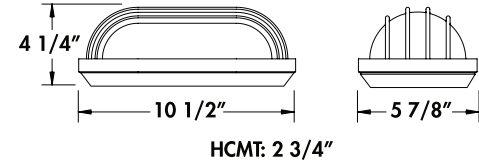

PFE103

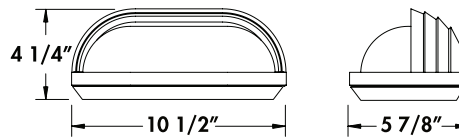


PFE104

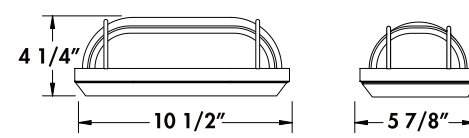

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFE101	INCANDESCENT, MEDIUM	W-White	POLYCARBONATE	LED LAMP, 3 YEAR
PFE102	BASE, 120V	B- Black	F-Frosted	WARRANTY, DIMMABLE,
PFE103	I60-1 X 60W			ENERGY STAR
PFE104	G13-1 X 13W	W-White	POLYCARBONATE	LWE-A19/E26, 80CRI, 3000K
	G18-1 X 18W	B- Black	F-Frosted	LCE-A19/E26, 80CRI, 4000K
	G26-1 X 27W			L-CFL, 2700K



Job Name: _____

Type: _____

Part #: _____

Notes: _____

PFE Series COMMERCIAL EUROSTYLE




FEATURES:


- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated Aluminum Base
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6



PFE111

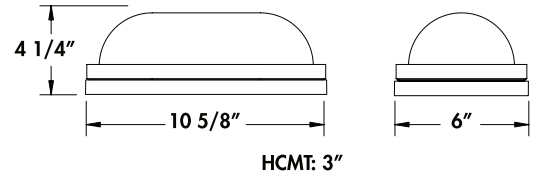


PFE113

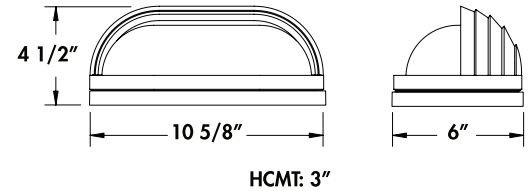

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFE111 PFE113	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W, 80 CRI</p> <p>>88 Lumens Per Watt** W-1140lm 3000K C -1280lm 4000K</p> <p>MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR</p> <p>L900 - 11.3W Power Input CRI 74 (TYP) >80 Lumens Per Watt**</p> <p>G13-1 X 13W G213- 2 X 13W G18-1 X 18W G26-1 X 27W</p>	<p>W-White B- Black</p> <p>W-White B- Black</p> <p>W-White B- Black</p>	<p>POLYCARBONATE F-Frosted</p> <p>POLYCARBONATE F-Frosted</p> <p>POLYCARBONATE F-Frosted</p>	<p>P-Photocell</p> <p>N/A</p> <p>P-Photocell L-CFL, 2700K</p>



Job Name: _____

Type: _____

Part #: _____

Notes: _____

PFE112/PFE114


COMMERCIAL EUROSTYLE




RoHS compliant



PFE114

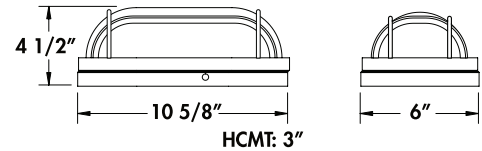

PFE112

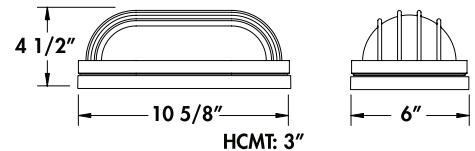

FEATURES:

- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated Aluminum Base
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFE112 PFE114	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR</p> <p>LE800 - 13W, 80 CRI W-1140lm 3000K >88 Lumens Per Watt** C-1280lm 4000K</p> <p>MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR</p> <p>L900 - 11.3W Power Input C-912lm 4000K CRI 74 (TYP) >80 Lumens Per Watt**</p> <p>G13-1 X 13W G213- 2 X 13W G18-1 X 18W G26-1 X 27W</p>	<p>W-White B- Black</p> <p>W-White B- Black</p> <p>W-White B- Black</p>	<p>POLYCARBONATE F-Frosted</p> <p>POLYCARBONATE F-Frosted</p> <p>POLYCARBONATE F-Frosted</p>	<p>P-Photocell</p> <p>N/A</p> <p>P-Photocell L-CFL, 2700K</p>