

**PROlite** LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

CATALOG NO: \_\_\_\_\_

NOTES: \_\_\_\_\_

# AmberLED LEDicated Vaporproof Angled Shade

AmberLED Angled Small LED Traverse Accent Light

**L70**  
25°C **187,000 Hours**



PVB53Q



PVP53Q

## HOUSING

- Heavy Duty Die Cast Aluminum Housing with Integral Heat Sinking, 3/4" NPS Threaded Mounts. Includes Shade Required to Maintain FWC Certification.

## LISTINGS AND RATINGS

- CSA Listed for Wet Locations, ANSI/UL 1598, 8750. IP66 Sealed LED Compartment

## FINISH

- Smooth Powdercoat Finish Over a Chromate Conversion Coating.
- Custom Colors Available Upon Request

## LENS

- Flat Clear Tempered Glass Lens

## MOUNTING OPTIONS

- Pendant Mount or Surface Mount on Wall or Ceiling

## AmberLED

- Aluminum Boards

## WATTAGE

- Array: 22w, System: 27w (175w HID Equivalent)

## DRIVER

- Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

## WARRANTY


- 5-Year Warranty for -40°C to +50°C Environment.

The LEPA AmberLED LEDicated Vaporproof pendant, wall and ceiling mount fixtures with angled shades are available with a shielded IES Type V distribution, and are certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential, parks, schools and universities, office buildings and medical facilities. Mounting heights of up to 12 feet can be used based on light level and uniformity requirements.

## DIMENSIONS

### Dimensions

<b>Diameter (D)</b>	11 3/4" (296mm)
<b>Height (A)</b>	<b>PVP53Q</b> 16 1/4" (414mm)
	<b>PVB53Q</b> 15 1/2" (394mm)
	<b>PVW53Q</b> 19" (483mm)




Certification #2018-001

## ORDERING INFORMATION: EXAMPLE= PVW53QF1X23UAMPSFAS

MODEL	OPTICS	WATTAGE	DRIVER	CCT	COLOR	OPTIONS	SHIELD
PVB53Q=AmberLED LEDicated Box Mount Vaporproof PVP53Q=AmberLED LEDicated Pendant Mount Vaporproof PVW53Q=AmberLED LEDicated Wall Mount Vaporproof	F=Type V	1X23=23w	U = 120-277V	AM=Amber	P=Platinum C=Custom (Consult Factory)	SF = Single Fuse DF = Double Fuse	AS=Angled Shade

215-512-8100 • Fax 267-288-5604  
421 Bustleton Pike, Feasterville, PA 19053  
www.proliteled.com

Specifications subject to change without prior notice.  
© 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED



## ACCESSORIES AND REPLACEMENT PARTS




\*Shown Mounted

Accessories (Order separately, Field installed)	
VS30A	Angled Aluminum Shade, Repaintable Textured Gray Finish
VWGA	Wire Guard for Angled Shade, Stainless Steel
CPRB	Reducer Bushing, ¼" to ½", use with Swivel Mount
CPRB1	Die Cast Round Electrical Box with Five (5) ½" Coin Plugs
CPRC1	Backplate, ½" Coin Plugs
CPRB3	Die Cast Round Electrical Box with Five (5) ¾" Coin Plugs

Mounting Accessories (Order separately, Field installed)	
CPSPR	Swivel Pendant Mount - Round, for Angled or Straight Ceilings, Fits ¼" Conduit, Includes Reducer Bushing (to ½") & Set Screw, Powdercoat Finish
CPSPS	Swivel Pendant Mount - Square, or Angled or Straight Ceilings, Fits ¾" Conduit, Includes Reducer Bushing (to ½") & Set Screw, Powdercoat Finish

## PHOTOMETRIC DATA

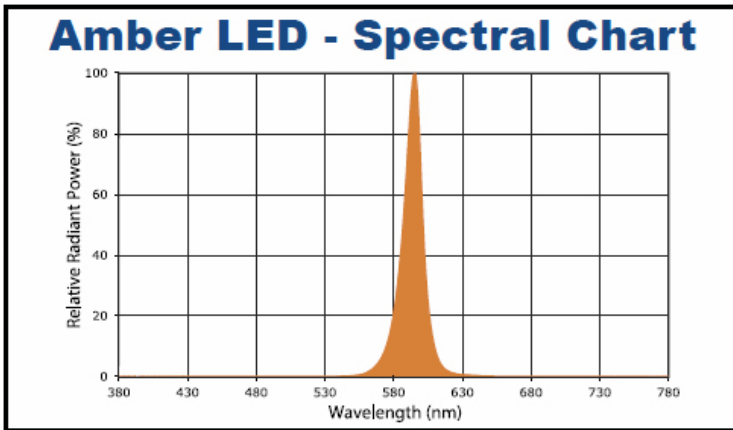

## PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics
AmberLED 23w	116	27	Type V

## PROJECTED LUMEN MAINTENANCE

Data shown for Amber LEDs			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	27	1.00	0.96	0.92	0.84	187,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	27	1.00	0.93	0.86	0.72	107,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	27	1.00	0.94	0.88	0.76	82,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.