

**PROlite** LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

CATALOG NO: \_\_\_\_\_

NOTES: \_\_\_\_\_

# PWPC15Q

AmberLED Constellation Medium Full Cutoff Wall Pack

L70  
25°C

213,000 Hours



## HOUSING

- Die Cast Hinged and Gasketed Aluminum Front Frame and Housing with 1/2" Coin Plugs. Nickel-Plated Stainless Steel Hardware. Photocell Adaptable. Includes Full Baffle Required to Maintain FWC Certification.

## LISTINGS AND RATINGS

- CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
- IP55 Sealed LED Compartment.

## FINISH

- Textured Architectural Bronze or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available On Request

## LENS

- Tempered Clear Flat Glass Lens

## MOUNTING OPTIONS

- Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit.

## AmberLED

- Aluminum Boards

## WATTAGE

- Array: 37w, System: 40w
- (250w HID Equivalent)

## DRIVER

- Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

## WARRANTY

- 5-Year Warranty for -40°C to +40°C Environment.




The LEPA AmberLED PWPC15Q Full Cut-off wall mount luminaire is available with a shielded IES Type V distribution, and is certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential, parks, schools and universities, office buildings and medical facilities. Mounting heights of up to 12 feet can be used based on light level and uniformity requirements.

## DIMENSIONS

### Dimensions

Width (D)	14 1/4" (361mm)
Length (B)	11 1/4" (289mm)
Height (A)	14" (356mm)

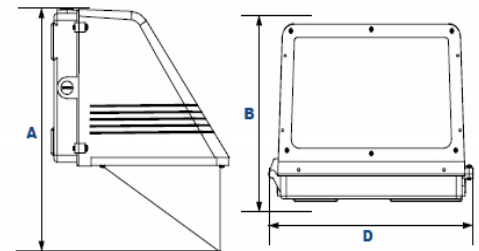


Certification #2018-001

## ORDERING INFORMATION: EXAMPLE= PWPC15QF1X37UAMCZSPBF

MODEL	OPTICS	WATTAGE	DRIVER	CCT	LENS	COLOR	OPTIONS	SHIELD
PWPC15Q	F=Type V	1X37=37w	U=120-277V	AM=Amber	C=Clear Flat Glass Lens	Z=Bronze B=Black C=Custom (Consult Factory))	SF=Single Fuse DF=Double Fuse SP=Surge Protection PC1=Photocell, 120VAC PC2=Photocell, 250-305VAC BU=Battery Backup, 90 Minutes	BF=Baffle

215-512-8100 • Fax 267-288-5604  
421 Bustleton Pike, Feasterville, PA 19053  
www.proliteled.com

Specifications subject to change without prior notice.  
© 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED



## ACCESSORIES AND REPLACEMENT PARTS




PC1 & PC2



3EBL1202774500

Replacement Parts (Order separately, Field installed)	
WPC15GLC	Tempered Clear Flat Glass Lens.
PC1	120VAC, Photocell
PC2	250-305VAC, Photocell
3EBL1202774500	Battery Backup, Provides 90 Minutes of Backup Power.

## PHOTOMETRIC DATA

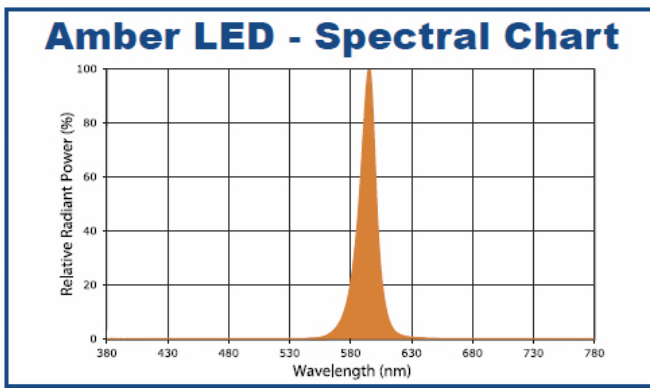

## PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Amber LEDs	
				Lumens	LPW
AmberLED 37w	525	40	Type V	1,279	32

## PROJECTED LUMEN MAINTENANCE

Data shown for Amber LEDs		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	40	1.00	0.96	0.93	0.86	213,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	40	1.00	0.93	0.87	0.73	113,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	40	1.00	0.95	0.89	0.78	91,000

### NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.