

SEEPLEX50 Exit Sign



INDOOR | EXPLOSION PROOF | LEED POINTS QUALIFIED

■ specifications: internal

The SEEPLEX50 is 100% reliable, there are no internal parts to fail. It is a non-toxic, non-radioactive low profile exit solution. The SEEPLEX50 is visible at up to 50 feet.


■ specifications: external

Construction: ABS plastic with photoluminescent panel. The SEEPLEX50 can be used for high and/or low level installations and has a 25 year life expectancy. It is visible at 50 feet during a blackout condition. The SEEPLEX50 meets current building codes, NFPA Life Safety Code 101 and OSHA requirements; International Building Code 2009/2018; International Fire Code 2009/2018. Universal bracket allows for ceiling and flag mount installation.

■ specifications: electrical

CIRCUIT: Since there is no electricity required, the SEEPLEX50 is a safer signage solution, which saves on maintenance and energy costs.

INSTALLATION: Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

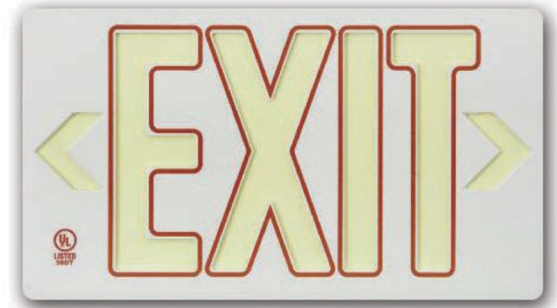


■ specifications: mechanical

The SEEPLEX50 series utilizes photoluminescent technology which absorbs and stores ambient light. It is a non-toxic, and non-radioactive low profile emergency lighting solution. The SEEPLEX50 features field adjustable chevrons and is constructed of ABS plastic with photoluminescent panel. The SEEPLEX50 is NON-TOXIC and NON-RADIOACTIVE which eliminates disposal fees.

■ warranty

The SEEPLEX50 Series comes with a 10 year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

■ dimensions

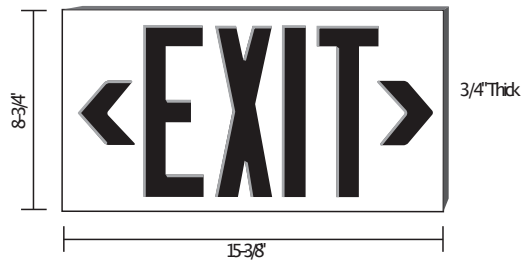

■ ordering logic

Series	Face No.	Frame Color	Lettering Outline	Mounting
SEEPLEX50	P1 (single)	R (red) ¹	G (green)	UB (universal mounting bracket)
	P2 (double)	G (green) ¹	R (red)	
			B (black) ¹	
			W (white) ²	

NOTE 1: Lettering outline not available.

NOTE 2: White frame must specify Red or Green letter outline.

EXAMPLE: SEEPLEX50-P1-W-G-UB

DESCRIPTION: SEEPLEX50 single face, white frame, green outline letters, universal mounting bracket