

# SEEXA

## Compact Thermoplastic Exit Sign

### STANDARD



### OPTIONAL



### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.


### OPTIONS

- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.*
- *Custom: Signs available with requested 'special' wording.*
- *USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.*

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

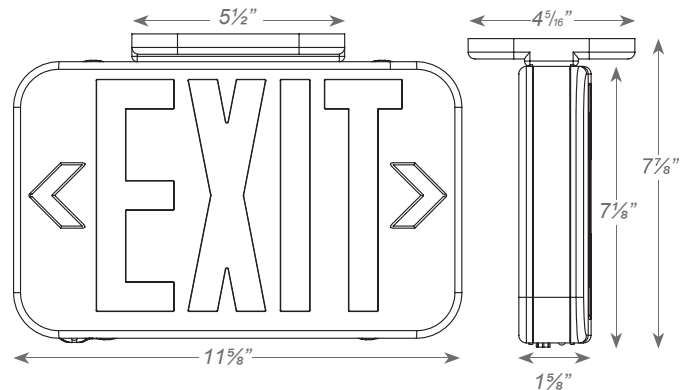

### ORDERING INFORMATION

Sample Part Number: **SEEXA2RWEM**

SALIDA face plate option available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	BATTERY
SEEXA	2 Universal Single/ Double Face	R Red	W White	(blank) AC Only	SDT Self-Diagnostics <sup>2,3</sup>
		G Green	B Black	EM	Custom Custom wording
		RG Red/Green <sup>1</sup>			USA Assembled in USA

<sup>1</sup> Field selectable

<sup>2</sup> Available only with EM units.

<sup>3</sup> Not available with RG units.

**ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
SEEXA-RED/GREEN EM	1.0	1.0	0.1	0.1
SEEXA-RED SDT	2.5	2.5	0.05	0.05
SEEXA-GREEN SDT	2.7	2.7	0.05	0.05