

# PWPX

## LED Wall Pack Hazardous Location (CID2 + CIID2)

### FEATURES

- Die cast aluminum housing and high impact polycarbonate diffuser
- Compliance to UL844 Class I Division 2, Groups A,B,C,D. Class II Division 2 Groups F,G. Class III. CSA C22.2 No 137
- Operation Temperature -40°C ~ +55°C

### SPECIFICATIONS

#### PERFORMANCE

**Watts:** 60W

**LED Chip:** Lumileds

**Lumens :** 8,855.93LM

**LPW:** 149.25 lm/W

**Input Voltage:** 120-277V

**CCT:** 5000 K

**CRI:**  $\geq 70$

**Dimming:** None

**Power Factor:**  $\geq 90$

**THD:**  $\leq 20\%$  Type

**Beam Angle:** 4-Short



**Housing:** Diecast Aluminum

**Finish:** ADC12 Powder coat

**Surge Protection** 4KV (option 6KV)

**IP Rating:** IP65

**Distribution:** Type 4

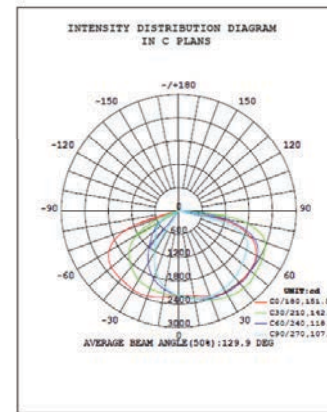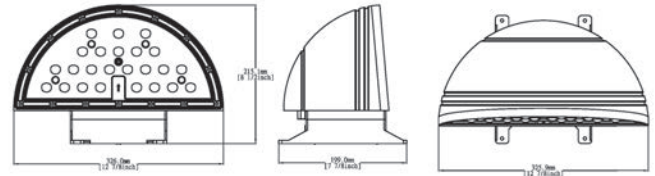

### ORDERING INFORMATION

Product Series	Wattage	Voltage	CCT	Finish
<b>PWPX</b>	<b>6 = 60W</b>	<b>LV = 100-277V</b>	<b>3 = 3000K</b>	<b>Black</b>
			<b>4 = 4000K</b>	<b>White</b>
			<b>5 = 5000K</b>	<b>Brown</b>
				<b>Orange</b>
				<b>Yellow</b>