

# PRDI-2X4 Series

## 2X4 Recessed Direct-Indirect Center Basket

This attractive 2'x4' Direct/Indirect Center Basket Troffer Unit combines the energy efficient performances of electronic ballast with soft low-glare contemporary design. The PRDI-C unit is designed for use with T5, and T8 lamps to provide uniform balanced illumination, consistent distribution and high end appearance. Designed for use in most offices and retail establishments this unit is as efficient as it is attractive.


**Construction:** Housing is die formed from heavy gauge steel and is finished in a matte white polyester powder coating for maximum reflectivity and durability. Perforated center basket incorporates hinges from both sides to allow for easy lamp replacement.

**Electrical:** All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648


**Mounting:** Designed for use in inverted T Bar ceilings, this fixture comes with integral earthquake clips built into end plate. All units are equipped access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

### WARRANTY & LISTINGS:


- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 5900664

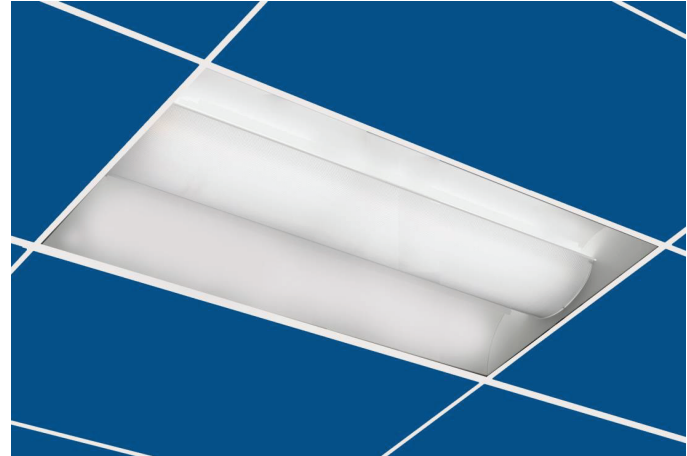

### DIMENSIONS

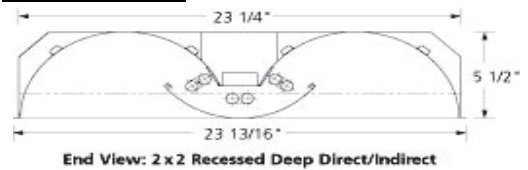

		Zonal Cavity Coefficients of Utilization															
Ceiling		.80				.70				.50				.30			
Wall		.70	.50	.30	.10	.70	.50	.30	.10	.50	.30	.10	.50	.30	.10	.50	.30
0	6	56	56	56	56	55	55	55	55	53	53	53	50	50	50	48	48
1	52	50	48	46	51	49	47	46	47	45	44	43	43	42	42	41	41
2	46	44	41	38	46	43	40	38	41	39	37	36	36	35	35	34	34
3	44	39	35	33	43	38	35	32	37	34	32	30	31	30	29	28	28
4	40	35	31	28	39	34	30	28	33	30	27	25	27	26	25	24	24
5	37	31	27	24	36	30	26	23	29	26	23	20	23	22	21	20	20
6	34	28	23	20	33	27	23	20	26	23	20	17	20	19	18	17	17
7	31	25	21	18	30	24	21	18	24	20	18	15	18	17	16	15	15
8	29	22	18	15	28	22	18	15	21	18	15	12	16	15	14	13	13
9	26	20	16	13	26	20	16	13	19	16	13	10	14	13	12	11	11
10	24	18	14	12	24	18	14	12	17	14	12	9	12	11	10	9	9

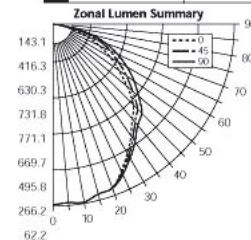

max weight= 20lbs

### Ordering Guide

PRDI-2X4

Series	# of Lamps	Lamp Size	Ballast Type	Options
PRDI-2X4	1 = 1 Lamp 2 = 2 lamp 3 = 3 lamp	T8 32 = 48" T5 28 = 48" T5HO 54 = 48"	MV = Multivolt E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit  SET LED N = Wired 1 end hot for LED tubes SET LED N/S = Wired 2 ends hot for LED tubes W/LEDIF = LED ballast driven tubes	EMB = Emergency Ballast 2BAL= 2 BALLAST