

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## COLONIAL COLLECTION




### SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- POST TOPS FIT MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS
- ESTIMATED 50,000 HRS L
- 5 YEAR WARRANTY
- DIMMABLE
- ACRYLIC DIFFUSER
- STANDARD PACK QTY: 6
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS




**PFC133**



EXTENDS: 8 1/2"  
HCMT: 10 5/8"




**PFC132**

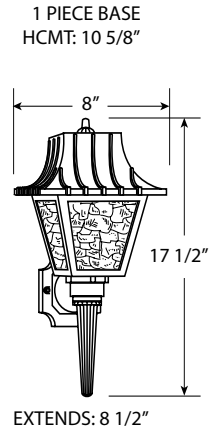

EXTENDS: 8 1/2"



**PFC232**



### ORDERING INFORMATION

STYLE #	SOURCE/WATTAGE	LUMENS/CCT	BODY	LENS	OPTIONS
PFC232 = POST	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR FLEMISH	
PFC132 = LONG PFC133 = SHORT	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR FLEMISH	P = PHOTOCELL

LE800 LED REPLACEMENT PARTS	
L08-AC120R-W	= 900 LUMEN 3000K ARRAY
L08-AC120R-C	= 1000 LUMEN 4000K ARRAY

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\* ESTIMATED FROM LED SOURCE